

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 223 305 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.07.2002 Bulletin 2002/29

(21) Application number: 02290106.0

(22) Date of filing: 15.01.2002

(51) Int Cl.7: **E21B 43/10**, E21B 43/08,
E21B 33/127, E21B 33/12,
E21B 33/124, E21B 29/10,
E21B 17/00, A61F 2/06,
F16L 11/00, F16B 4/00

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 16.01.2001 US 261749 P
08.06.2001 US 296875 P

(71) Applicants:
• **SERVICES PETROLIERS SCHLUMBERGER**
75007 Paris (FR)
Designated Contracting States:
FR
• **SCHLUMBERGER TECHNOLOGY B.V.**
2514 JG The Hague (NL)
Designated Contracting States:
BE CH DE DK ES FI GR IE IT LI LU MC PT SE AT
CY
• **SCHLUMBERGER HOLDINGS LIMITED**
Road Town, Tortola (VG)
Designated Contracting States:
GB NL

(72) Inventors:
• **Hart, Barrie**
Ipswich, Suffolk PK4 3BP (GB)
• **Johnson, Craig D.**
Montgomery, Texas 77356 (US)
• **Schetky, L. McD.**
Camden, Maine 04843 (US)

(74) Representative: **Hyden, Martin**
Etudes et Productions Schlumberger,
Intellectual Property Department,
1, rue Henri Becquerel
92142 Clamart Cedex (FR)

(54) **Bi-stable expandable device and method for expanding such a device**

(57) An expandable device comprising a plurality of expandable cells (23). The cells may be bistable cells or other types of cells that are expanded from a contracted position towards an expanded position. Additionally, the cells may be combined with locking mechanisms to hold the structure in an expanded position.

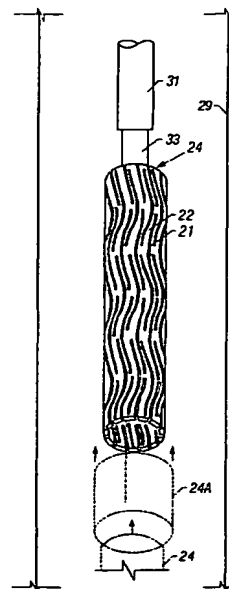


FIG. 4C

EP 1 223 305 A2

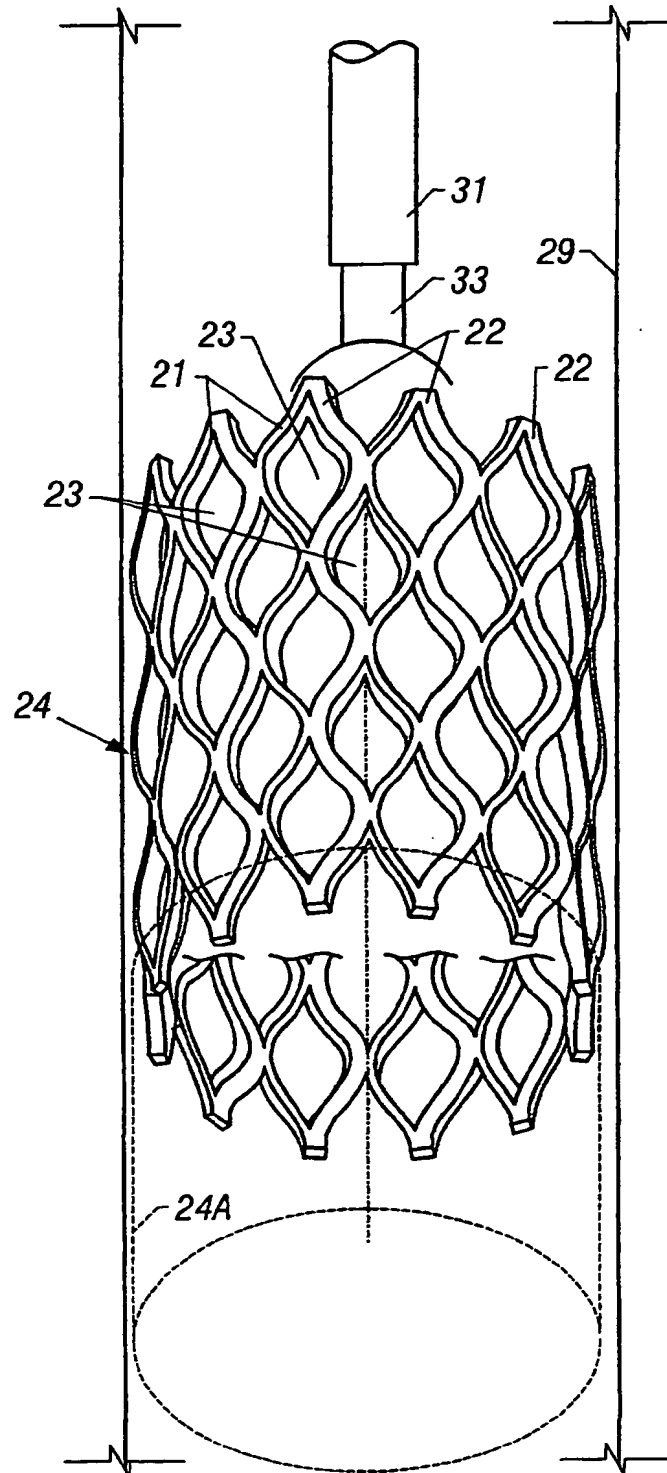


FIG. 4D

Description

[0001] This invention relates generally to expandable devices, and particularly to devices formed from one or more expandable cells that facilitate transition of the device from a contracted state to an expanded state.

[0002] In a variety of applications and environments, it would be beneficial to have a device able to transition from a contracted state to an expanded state. Such devices can comprise planar members, tubular members, rectangular members and a variety of other configurations. Exemplary applications include medical applications in which expandable devices, such as stents, are deployed at a desired location and then expanded. Another exemplary application comprises the use of expandables in the retrieval of various fluids, e.g. oil, from subterranean locations.

[0003] For example, fluids such as oil, natural gas and water are obtained from subterranean geologic formations (a "reservoir") by drilling a well that penetrates the fluid-bearing formation. Once a wellbore has been drilled to a certain depth, the borehole wall typically is supported to prevent collapse. During the drilling and use of a wellbore, various tubular members, such as liners, casings, sandscreens, etc. are deployed within the wellbore.

[0004] Various methods have been developed for radially expanding tubulars by, for instance, pulling an expansion mandrel through the tubular to plastically deform the tubular in a radially outward direction. Such an approach, however, requires a large amount of force to achieve the desired expansion.

[0005] The medical industry, oil industry and a variety of other industries utilize certain types of expandables or would benefit from the use of expandables in numerous applications. However, there are very few existing devices that are readily expandable at a desired location. Of the devices that do exist, substantial forces are required to create the expansion. Also, substantial plastic deformation often occurs which can limit the selection of available materials for a given expandable device. The present invention is directed to overcoming, or at least reducing, the effects of one or more of the problems set forth above.

[0006] The present invention relates generally to expandable devices that may be used, for example, in subterranean environments. In one embodiment of the invention, the expandable device comprises one or more expandable cells that facilitate expansion of the device. By way of example, a tubular may be formed with a plurality of expandable cells that facilitate radial expansion of the device from a collapsed or contracted state to an expanded state. A variety of cell types and cell designs may be utilized depending on the application and desired parameters of the expandable device.

[0007] The invention will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements, and:

Figures 1A and 1B are illustrations of the forces imposed to make a bistable structure;

Figure 2A and 2B show force-deflection curves of two bistable structures;

Figures 3A - 3F illustrate expanded and collapsed states of three bistable cells with various thickness ratios;

Figures 4A and 4B illustrate a bistable expandable tubular in its expanded and collapsed states;

Figures 4C and 4D illustrate a bistable expandable tubular in collapsed and expanded states within a wellbore;

Figures 5A and 5B illustrate an expandable packer type of deployment device;

Figures 6A and 6B illustrate a mechanical packer type of deployment device;

Figures 7A - 7D illustrate an expandable swage type of deployment device;

Figures 8A - 8D illustrate a piston type of deployment device;

Figures 9A and 9B illustrate a plug type of deployment device;

Figures 10A and 10B illustrate a ball type of deployment device;

Figure 11 is a schematic of a wellbore utilizing an expandable bistable tubular;

Figure 12 illustrates a motor driven radial roller deployment device;

Figure 13 illustrates a hydraulically driven radial roller deployment device;

Figure 14 is a cross sectional view of one embodiment of the packer of the present invention;

Figure 15 is a cross sectional view of another embodiment of the packer of the present invention;

Figure 16 is a side elevation view of an embodiment of the present invention in a contracted state;

Figure 17 is a side elevation view of an embodiment of the present invention in an expanded state;

Figures 18A-C are schematic views of an alternative embodiment of the present invention;

Figure 19 is a perspective view of an alternative embodiment of the present invention;

Figure 20 is a schematic view of an alternative embodiment of the present invention;

Figure 21 is a schematic view of an alternative embodiment of the present invention;

Figures 22A-B are partial side elevational view of an embodiment of the present invention in the contracted and expanded positions respectively;

Figures 23A-B are partial side elevational views of an embodiment of the present invention in the contracted and expanded positions respectively;

Figures 24A-B are side elevational views of an alternate embodiment of an expandable cell in its contracted and expanded positions, respectively;

Figures 25A-B are side elevational views of a cell similar to that illustrated in Figures 24A-B deployed in its contracted and expanded positions, respectively;

Figures 26A-B illustrate another embodiment of expandable cells displayed in their contracted and expanded positions, respectively;

Figures 27A-B illustrate another embodiment of expandable cells displayed in their contracted and expanded positions, respectively;

Figures 28A-B illustrate another embodiment of expandable cells displayed in their contracted and expanded positions, respectively;

Figures 29A-B illustrate another embodiment of expandable cells displayed in their contracted and expanded positions, respectively;

Figures 30A-B illustrate another embodiment of an expandable cell displayed in its contracted and expanded position, respectively;

Figures 31A-C illustrate a cell with energy storage members moving from a contracted state to an expanded state;

Figures 32A-32B illustrate another embodiment of the cell illustrated in Figures 31A-C in a contracted position and expanded position, respectively;

Figure 33 illustrates another exemplary expandable cell design;

Figure 34 illustrates another exemplary expandable

cell design;

Figures 35A-D illustrate an exemplary locking mechanism moving through various stages from a closed position to an open, locked position;

Figures 36A-D illustrate another embodiment of the locking mechanism of Figure 35;

Figure 37 illustrates a locking mechanism combined with an expandable cell;

Figure 38A-B illustrate an expandable cell combined with a locking mechanism in a collapsed and expanded position, respectively;

Figure 39 illustrates an expandable cell with another embodiment of a locking mechanism;

Figures 40A-B illustrate an individual expandable cell and a plurality of expandable cells, respectively, combined with corresponding locking mechanisms;

Figures 41A-B illustrate another embodiment of combined expandable cells and locking mechanisms in collapsed and expanded positions, respectively; and

Figure 42 is a schematic representation of the combination of expandable cells having differing sizes and configurations in a single expandable device.

[0008] While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

[0009] The following describes a variety of expandable devices that utilize expandable cells to facilitate expansion of the device from a contracted state to an expanded state. Various expansion techniques, expandable cell designs, and locking mechanisms are described, and typically the description is related to one or more exemplary applications. For example, the cells are described for use in tubular components, such as tubulars used in the oil production industry. However, this application is only an exemplary application to demonstrate the applicability of the various cells and locking mechanisms described herein. The description should not be construed as limiting the application of such expandable devices to the particular environments or applications described herein. Rather the techniques for formulating expandable devices can have a wide range

of applications in other environments and industries.

[0010] As described below, exemplary expandable devices may or may not comprise bistable cells. Whether bistable or not, the expandable cells facilitate expansion of a given device between a contracted state and an expanded state for a variety of operations or procedures. The selection of a particular type of expandable cell depends on a variety of factors including environment, degree of expansion, materials available, etc.

[0011] Bistable devices used in the present invention can take advantage of a principle illustrated in Figures 1A and 1B. Figure 1A shows a rod 10 fixed at each end to rigid supports 12. If the rod 10 is subjected to an axial force it begins to deform as shown in Figure 1B. As the axial force is increased rod 10 ultimately reaches its Euler buckling limit and deflects to one of the two stable positions shown as 14 and 15. If the buckled rod is now clamped in the buckled position, a force at right angles to the long axis can cause the rod to move to either of the stable positions but to no other position. When the rod is subjected to a lateral force it must move through an angle β before deflecting to its new stable position.

[0012] Bistable systems are characterized by a force deflection curve such as those shown in Figures 2A and 2B. The externally applied force 16 causes the rod 10 of Fig. 1B to move in the direction X and reaches a maximum 18 at the onset of shifting from one stable configuration to the other. Further deflection requires less force because the system now has a negative spring rate and when the force becomes zero the deflection to the second stable position is spontaneous.

[0013] The force deflection curve for this example is symmetrical and is illustrated in Figure 2A. By introducing either a precurvature to the rod or an asymmetric cross section the force deflection curve can be made asymmetric as shown in Figure 2B. In this system the force 19 required to cause the rod to assume one stable position is greater than the force 20 required to cause the reverse deflection. The force 20 must be greater than zero for the system to have bistable characteristics.

[0014] Bistable structures, sometimes referred to as toggle devices, have been used in industry for such devices as flexible discs, over center clamps, holddown devices and quick release systems for tension cables (such as in sailboat rigging backstays).

[0015] Instead of using the rigid supports as shown in Figures 1A and 1B, a cell can be constructed where the restraint is provided by curved struts connected at each end as shown in Figures 3A - 3F. If both struts 21 and 22 have the same thickness as shown in Figures 3A and 3B, the force deflection curve is linear and the cell lengthens when compressed from its open position Figure 3B to its closed position Figure 3A. If the cell struts have different thicknesses, as shown in Figures 3C - 3F, the cell has the force deflection characteristics shown in Figure 2B, and does not change in length when it moves between its two stable positions. An expandable bistable tubular can thus be designed so that as the radial

dimension expands, the axial length remains constant. In one example, if the thickness ratio is over approximately 2:1, the heavier strut resists longitudinal changes. By changing the ratio of thick-to-thin strut dimensions, the opening and closing forces can be changed. For example, Figures 3C and 3D illustrated a thickness ratio of approximately 3:1, and Figures 3E and 3F illustrate a thickness ratio of approximately 6:1.

[0016] An expandable bore bistable tubular, such as casing, a tube, a patch, or pipe, can be constructed with a series of circumferential bistable connected cells 23 as shown in Figures 4A and 4B, where each thin strut 21 is connected to a thick strut 22. The longitudinal flexibility of such a tubular can be modified by changing the length of the cells and by connecting each row of cells with a compliant link. Further, the force deflection characteristics and the longitudinal flexibility can also be altered by the design of the cell shape. Figure 4A illustrates an expandable bistable tubular 24 in its expanded configuration while Figure 4B illustrates the expandable bistable tubular 24 in its contracted or collapsed configuration. Within this application the term "collapsed" is used to identify the configuration of the bistable element or device in the stable state with the smallest diameter, it is not meant to imply that the element or device is damaged in any way. In the collapsed state, bistable tubular 24 is readily introduced into a wellbore 29, as illustrated in Figure 4C. Upon placement of the bistable tubular 24 at a desired wellbore location, it is expanded, as illustrated in Figure 4D.

[0017] The geometry of the bistable cells is such that the tubular cross-section can be expanded in the radial direction to increase the overall diameter of the tubular. As the tubular expands radially, the bistable cells deform elastically until a specific geometry is reached. At this point the bistable cells move, e.g. snap, to a final expanded geometry. With some materials and/or bistable cell designs, enough energy can be released in the elastic deformation of the cell (as each bistable cell snaps past the specific geometry) that the expanding cells are able to initiate the expansion of adjoining bistable cells past the critical bistable cell geometry. Depending on the deflection curves, a portion or even an entire length of bistable expandable tubular can be expanded from a single point.

[0018] In like manner if radial compressive forces are exerted on an expanded bistable tubular, it contracts radially and the bistable cells deform elastically until a critical geometry is reached. At this point the bistable cells snap to a final collapsed structure. In this way the expansion of the bistable tubular is reversible and repeatable. Therefore the bistable tubular can be a reusable tool that is selectively changed between the expanded state as shown in Figure 4A and the collapsed state as shown in Figure 4B.

[0019] In the collapsed state, as in Figure 4B, the bistable expandable tubular is easily inserted into the wellbore and placed into position. A deployment device is

then used to change the configuration from the collapsed state to the expanded state.

[0020] In the expanded state, as in Figure 4A, design control of the elastic material properties of each bistable cell can be such that a constant radial force can be applied by the tubular wall to the constraining wellbore surface. The material properties and the geometric shape of the bistable cells can be designed to give certain desired results.

[0021] One example of designing for certain desired results is an expandable bistable tubular string with more than one diameter throughout the length of the string. This can be useful in boreholes with varying diameters, whether designed that way or as a result of unplanned occurrences such as formation washouts or keyseats within the borehole. This also can be beneficial when it is desired to have a portion of the bistable expandable device located inside a cased section of the well while another portion is located in an uncased section of the well. Figure 11 illustrates one example of this condition. A wellbore 40 is drilled from the surface 42 and comprises a cased section 44 and an openhole section 46. An expandable bistable device 48 having segments 50, 52 with various diameters is placed in the well. The segment with a larger diameter 50 is used to stabilize the openhole section 46 of the well, while the segment having a reduced diameter 52 is located inside the cased section 44 of the well.

[0022] Bistable collars or connectors 24A (see Figure 4C) can be designed to allow sections of the bistable expandable tubular to be joined together into a string of useful lengths using the same principle as illustrated in Figure 4A and 4B. This bistable connector 24A also incorporates a bistable cell design that allows it to expand radially using the same mechanism as for the bistable expandable tubular component. Exemplary bistable connectors have a diameter slightly larger than the expandable tubular sections that are being joined. The bistable connector is then placed over the ends of the two sections and mechanically attached to the expandable tubular sections. Mechanical fasteners such as screws, rivets or bands can be used to connect the connector to the tubular sections. The bistable connector typically is designed to have an expansion rate that is compatible with the expandable tubular sections, so that it continues to connect the two sections after the expansion of the two segments and the connector.

[0023] Alternatively, the bistable connector can have a diameter smaller than the two expandable tubular sections joined. Then, the connector is inserted inside of the ends of the tubulars and mechanically fastened as discussed above. Another embodiment would involve the machining of the ends of the tubular sections on either their inner or outer surfaces to form an annular recess in which the connector is located. A connector designed to fit into the recess is placed in the recess. The connector would then be mechanically attached to the ends as described above. In this way the connector

forms a relatively flush-type connection with the tubular sections.

[0024] A conveyance device 31 transports the bistable expandable tubular lengths and bistable connectors into the wellbore and to the correct position. (See Figures 4C and 4D). The conveyance device may utilize one or more mechanisms such as wireline cable, coiled tubing, coiled tubing with wireline conductor, drill pipe, tubing or casing.

[0025] A deployment device 33 can be incorporated into the overall assembly to expand the bistable expandable tubular and connectors. (See Figures 4C and 4D). Deployment devices can be of numerous types such as an inflatable packer element, a mechanical packer element, an expandable swage, a piston apparatus, a mechanical actuator, an electrical solenoid, a plug type apparatus, e.g. a conically shaped device pulled or pushed through the tubing, a ball type apparatus or a rotary type expander as further discussed below.

[0026] An inflatable packer element is shown in Figures 5A and 5B and is a device with an inflatable bladder, element, or bellows incorporated into the bistable expandable tubular system bottom hole assembly. In the illustration of Figure 5A, the inflatable packer element 25 is located inside the entire length, or a portion, of the initial collapsed state bistable tubular 24 and any bistable expandable connectors (not shown). Once the bistable expandable tubular system is at the correct deployment depth, the inflatable packer element 25 is expanded radially by pumping fluid into the device as shown in Figure 5B. The inflation fluid can be pumped from the surface through tubing or drill pipe, a mechanical pump, or via a downhole electrical pump which is powered via wireline cable. As the inflatable packer element 25 expands, it forces the bistable expandable tubular 24 to also expand radially. At a certain expansion diameter, the inflatable packer element causes the bistable cells in the tubular to reach a critical geometry where the bistable "snap" effect is initiated, and the bistable expandable tubular system expands to its final diameter. Finally the inflatable packer element 25 is deflated and removed from the deployed bistable expandable tubular 24.

[0027] A mechanical packer element is shown in Figures 6A and 6B and is a device with a deformable plastic element 26 that expands radially when compressed in the axial direction. The force to compress the element can be provided through a compression mechanism 27, such as a screw mechanism, cam, or a hydraulic piston. The mechanical packer element deploys the bistable expandable tubulars and connectors in the same way as the inflatable packer element. The deformable plastic element 26 applies an outward radial force to the inner circumference of the bistable expandable tubulars and connectors, allowing them in turn to expand from a contracted position (see Figure 6A) to a final deployment diameter (see Figure 6B).

[0028] An expandable swage is shown in Figures 7A

- 7D and comprises a series of fingers 28 that are arranged radially around a conical mandrel 30. Figures 7A and 7C show side and top views respectively. When the mandrel 30 is pushed or pulled through the fingers 28 they expand radially outwards, as illustrated in Figures 7B and 7D. An expandable swage is used in the same manner as a mechanical packer element to deploy a bistable expandable tubular and connector.

[0029] A piston type apparatus is shown in Figures 8A - 8D and comprises a series of pistons 32 facing radially outwardly and used as a mechanism to expand the bistable expandable tubulars and connectors. When energized, the pistons 32 apply a radially directed force to deploy the bistable expandable tubular assembly as per the inflatable packer element. Figures 8A and 8C illustrate the pistons retracted while Figures 8B and 8D show the pistons extended. The piston type apparatus can be actuated hydraulically, mechanically or electrically.

[0030] A plug type actuator is illustrated in Figures 9A and 9B and comprises a plug 34 that is pushed or pulled through the bistable expandable tubulars 24 or connectors as shown in Figure 9A. The plug is sized to expand the bistable cells past their critical point where they will snap to a final expanded diameter as shown in Figure 9B.

[0031] A ball type actuator is shown in Figures 10A and 10B and operates when an oversized ball 36 is pumped through the middle of the bistable expandable tubulars 24 and connectors. To prevent fluid losses through the cell slots, an expandable elastomer based liner 38 is run inside the bistable expandable tubular system. The liner 38 acts as a seal and allows the ball 36 to be hydraulically pumped through the bistable tubular 24 and connectors. The effect of pumping the ball 36 through the bistable expandable tubulars 24 and connectors is to expand the cell geometry beyond the critical bistable point, allowing full expansion to take place as shown in Figure 10B. Once the bistable expandable tubulars and connectors are expanded, the elastomer sleeve 38 and ball 36 are withdrawn.

[0032] Radial roller type actuators also can be used to expand the bistable tubular sections. Figure 12 illustrates a motor driven expandable radial roller tool. The tool comprises one or more sets of arms 58 that are expanded to a set diameter by means of a mechanism and pivot. On the end of each set of arms is a roller 60. Centralizers 62 can be attached to the tool to locate it correctly inside the wellbore and the bistable tubular 24. A motor 64 provides the force to rotate the whole assembly, thus turning the roller(s) circumferentially inside the wellbore. The axis of the roller(s) is such as to allow the roller(s) to rotate freely when brought into contact with the inner surface of the tubular. Each roller can be conically-shaped in section to increase the contact area of roller surface to the inner wall of the tubular. The rollers are initially retracted and the tool is run inside the collapsed bistable tubular. The tool is then rotated by the motor 64, and rollers 60 are moved outwardly to contact

the inner surface of the bistable tubular. Once in contact with the tubular, the rollers are pivoted outwardly a greater distance to apply an outwardly radial force to the bistable tubular. The outward movement of the rollers can be accomplished via centrifugal force or an appropriate actuator mechanism coupled between the motor 64 and the rollers 60.

[0033] The final pivot position is adjusted to a point where the bistable tubular can be expanded to the final diameter. The tool is then longitudinally moved through the collapsed bistable tubular, while the motor continues to rotate the pivot arms and rollers. The rollers follow a shallow helical path 66 inside the bistable tubular, expanding the bistable cells in their path. Once the bistable tubular is deployed, the tool rotation is stopped and the roller retracted. The tool is then withdrawn from the bistable tubular by a conveyance device 68 that also can be used to insert the tool.

[0034] Figure 13 illustrates a hydraulically driven radial roller deployment device. The tool comprises one or more rollers 60 that are brought into contact with the inner surface of the bistable tubular by means of a hydraulic piston 70. The outward radial force applied by the rollers can be increased to a point where the bistable tubular expands to its final diameter. Centralizers 62 can be attached to the tool to locate it correctly inside the wellbore and bistable tubular 24. The rollers 60 are initially retracted and the tool is run into the collapsed bistable tubular 24. The rollers 60 are then deployed and push against the inside wall of the bistable tubular 24 to expand a portion of the tubular to its final diameter. The entire tool is then pushed or pulled longitudinally through the bistable tubular 24 expanding the entire length of bistable cells 23. Once the bistable tubular 24 is deployed in its expanded state, the rollers 60 are retracted and the tool is withdrawn from the wellbore by the conveyance device 68 used to insert it. By altering the axis of the rollers 60, the tool can be rotated via a motor as it travels longitudinally through the bistable tubular 24.

[0035] Power to operate the deployment device can be drawn from one or a combination of sources such as: electrical power supplied either from the surface or stored in a battery arrangement along with the deployment device, hydraulic power provided by surface or downhole pumps, turbines or a fluid accumulator, and mechanical power supplied through an appropriate linkage actuated by movement applied at the surface or stored downhole such as in a spring mechanism.

[0036] The bistable expandable tubular system is designed so the internal diameter of the deployed tubular is expanded to maintain a maximum cross-sectional area along the expandable tubular. This feature enables mono-bore wells to be constructed and facilitates elimination of problems associated with traditional wellbore casing systems where the casing outside diameter must be stepped down many times, restricting access, in long wellbores.

[0037] The bistable expandable tubular system can

be applied in numerous applications such as an expandable open hole liner where the bistable expandable tubular 24 is used to support an open hole formation by exerting an external radial force on the wellbore surface. As bistable tubular 24 is radially expanded, the tubular moves into contact with the surface forming wellbore 29. These radial forces help stabilize the formations and allow the drilling of wells with fewer conventional casing strings. The open hole liner also can comprise a material, e.g. a wrapping, that reduces the rate of fluid loss from the wellbore into the formations. The wrapping can be made from a variety of materials including expandable metallic and/or elastomeric materials. By reducing fluid loss into the formations, the expense of drilling fluids can be reduced and the risk of losing circulation and/or borehole collapse can be minimized.

[0038] Liners also can be used within wellbore tubulars for purposes such as corrosion protection. One example of a corrosive environment is the environment that results when carbon dioxide is used to enhance oil recovery from a producing formation. Carbon dioxide (CO_2) readily reacts with any water (H_2O) that is present to form carbonic acid (H_2CO_3). Other acids can also be generated, especially if sulfur compounds are present. Tubulars used to inject the carbon dioxide as well as those used in producing wells are subject to greatly elevated corrosion rates. The present invention can be used to place protective liners, e.g. a bistable tubular 24, within an existing tubular to minimize the corrosive effects and to extend the useful life of the wellbore tubulars.

[0039] Another exemplary application involves use of the bistable tubular 24 as an expandable perforated liner. The open bistable cells in the bistable expandable tubular allow unrestricted flow from the formation while providing a structure to stabilize the borehole.

[0040] Still another application of the bistable tubular 24 is as an expandable sand screen where the bistable cells are sized to act as a sand control screen. Also, a filter material can be combined with the bistable tubular as explained below. For example, an expandable screen element can be affixed to the bistable expandable tubular. The expandable screen element can be formed as a wrapping around bistable tubular 24. It has been found that the imposition of hoop stress forces onto the wall of a borehole will in itself help stabilize the formation and reduce or eliminate the influx of sand from the producing zones, even if no additional screen element is used.

[0041] The above described bistable expandable tubulars can be made in a variety of manners such as: cutting appropriately shaped paths through the wall of a tubular pipe thereby creating an expandable bistable device in its collapsed state; cutting patterns into a tubular pipe thereby creating an expandable bistable device in its expanded state and then compressing the device into its collapsed state; cutting appropriate paths through a sheet of material, rolling the material into a

tubular shape and joining the ends to form an expandable bistable device in its collapsed state; or cutting patterns into a sheet of material, rolling the material into a tubular shape, joining the adjoining ends to form an expandable bistable device in its expanded state and then compressing the device into its collapsed state.

[0042] The materials of construction for the bistable expandable tubulars can include those typically used within the oil and gas industry such as carbon steel. They can also be made of specialty alloys (such as a monel, inconel, hastelloy or tungsten-based alloys) if the application requires.

[0043] The configurations shown for the bistable tubular 24 are illustrative of the operation of a basic bistable cell. Other configurations may be suitable, but the concept presented is also valid for these other geometries.

[0044] In Figures 14 and 15, a packer 80 formed of bistable cells is illustrated. The packer 80 has a tubular 82 formed of bistable cells 83, such as those previously discussed. In addition, the packer 80 has at least one seal 84 along at least a portion of its length. An exemplary seal 84 may include one or more layers positioned internally, externally, or both with respect to tubular 82. Additionally, the layer(s) may be intermixed with the openings formed in the cells.

[0045] Figure 14 illustrates an embodiment having an internal and an external seal 84. Figure 15 illustrates a packer 80 having only an internal seal 84. The seal 84 may be formed of an elastomer or other material. Further, the properties of the seal 84 allow it to at least match the expansion ratio of the tubular 82. Folds or other design characteristics of the seal 84 may be used to facilitate the expansion.

[0046] Also, a resin or catalyst 85 may be used to allow the seal 84 to harden after setting. In one alternative embodiment a resin or other flowable material is placed between the layers of seals 84 (as in Figure 14). Once the packer 80 is placed in the well and expanded, the flowable material may be hardened or otherwise altered to improve the sealing characteristics of the packer 80. In some applications, hardening of the resin or other material requires heating of the material by a service tool. The packer 80 can be expanded as described herein, and may comprise a variety of bistable cells. In one embodiment of use, the packer 80 is deployed on a run-in tool that includes an expanding tool. The packer 80 is positioned at the desired location and expanded to seal against the walls of the casing or other tubular. Typically, the packer 80 is connected to a tubing or other conduit that extends downhole below the packer 80. The packer 80 provides a seal in the annulus to prevent or restrict fluid flow longitudinally in the well (the typical use for packers). The present invention also may act as a well anchor which includes or excludes the seal 84.

[0047] In Figure 16, an alternative embodiment is illustrated in which the packer 80 forms a portion of a conduit. In the embodiment shown, a well conduit 90 (such

as a tubing) has a portion (marked as the packer 80) that is cut to form the bistable cells. The packer portion 80 has a seal 84 thereon as previously described. In Figure 16, a portion of the seal material 84 is illustrated as removed to reveal the bistable cells 83 in the underlying tubular 82. In Figure 17, the packer portion 80 is illustrated in its expanded state. It should be noted that in typical applications the well conduit 90 which does not have bistable cells formed therein, does not expand. Thus, one embodiment for attaching the well conduit to the packer 80 is to form the packer 80 as an integral part of the well conduit 90 (note that a welded connection resembles this embodiment and is an alternative method of forming the present invention). Other methods include conventional methods of non-integral connection. **[0048]** In alternative embodiments, the well conduit has a plurality of bistable cell packers 80 formed thereon. In yet another alternative embodiment, a portion or portions 91 of the well conduit in addition to the packer portions 80 are formed of bistable cells so that these other portions also undergo expansion (see Figure 17). The other portions may or may not have a material applied thereto. For example, the other portion may have a screen or filter material applied thereto to provide a well sand screen.

[0049] Referring to Figures 18A-C, an alternative design of the present invention is illustrated in a schematic, partial cross-sectional view. The expandable packer is shown in the retracted and expanded states, respectively, and in partial side elevational view (Figure 18C). The packer shown includes a base tubular 82 formed of thin struts 21 and thick struts 22 forming bistable cells 23/83 as previously described. Slats 92 are attached to the tubing 82 at one edge and extend generally longitudinally in the embodiment shown (see Figure 18C). Specifically, each slat 92 is attached to the tubing 82 at the thick struts 22, and the width of the slats is such that they overlap at least the adjacent slat when the tubing 82 is in the expanded state. Although illustrated as having a slat attached to each of the thick struts, the packer may have a slat attached to alternate thick struts 22 or in other configurations. Furthermore, the slats may extend in a direction other than the longitudinal direction. The slats 92 slide over one another during expansion so that the outside of the tubing 82 is covered by the overlapping slats 92.

[0050] A seal 84 may be attached to the slats 92 to provide the seal for the packer. Although shown in the figures as folded, the seal 84, may have other characteristics that facilitate its ability to expand with the slats 92 and tubular 82. Also, the seal 84 may have other characteristics previously mentioned (e.g., resin, internal seal, etc).

[0051] It should be noted that although described as a packer, the present invention may be used to provide isolation over a long length as opposed to a traditional packer or downhole tool which generally seals only a relatively short longitudinal distance. Thus, the present

invention may be used in a manner similar to a casing to provide isolation for an extended length.

[0052] In Figure 19, a perspective view of packer 80 (or isolation device) having a plurality of slats 92 attached thereto is illustrated in an overlapping arrangement as previously described. The tubing 82 includes end extensions 94 that extend longitudinally from the endmost cells. The slats 92 may be attached to the end extensions 94, to certain portions of the thick struts 22 and/or to certain thick struts 22. In one embodiment, for example, the struts 92 are attached to the thick struts which are longitudinally aligned with the end extensions 94. Although generally shown as attached at an edge of the slats 92, the slats also may attach to the tubing 82 at a position intermediate the edges.

[0053] In Figure 20, an expandable tubing (or conduit) 90 is illustrated positioned in a well 100. The conduit 90 includes a plurality of spaced packers 80 or expandable sealing devices. The expandable packers 80 engage the wellbore wall preventing annular flow thereby. Therefore, any microannulus formed between the expandable tubing 90 and the well 100 (which may include a casing) is sealed in the longitudinal direction to restrict or prevent unwanted flow thereby. The conduit 90 may include one or more such packers 80, as desired, to control the flow. Further, the packers 80 may be spaced at regular intervals or at some other predetermined spacing to control the flow in the annulus as needed.

[0054] In one example, illustrated schematically in Figure 21, the individual joints of tubing 90 are interconnected by a packer 80 to compartmentalize each joint of conduit from the adjacent joint(s). The packer 80 can be a separate connector as shown in Figure 21 or it can be formed as part of the joint. Accordingly, the packer 80 can be positioned at an end of the joint 90, in the middle of the joint 90, or at any other location along its length. In one embodiment both conduit 90 and packers 80, of Figures 20 and 21, are formed of bistable cells.

[0055] Referring generally to Figures 22A-B, an alternative embodiment of the present invention is disclosed. The device shown in these figures may be used as a packer, hanger, casing patch, or other device requiring expansion and is generally referred to herein in reference to these figures as an expandable tubular 120 for ease of description. The expandable tubular 120 comprises a series of cells 122 formed therein, such as by laser cutting, jet cutting, water jet cutting or other manufacturing methods. The cells 122 are oriented such that a number of longitudinal struts 24 are formed on the expandable tubular 120. Thus, as shown in the figures, the longitudinal struts 124 lie between longitudinal lengths of cells 122 with the cells 122 having relatively thinner struts 126 extending between adjacent longitudinal struts 124. As shown in the figures, as the adjacent longitudinal struts 124 are moved longitudinally relative to one another (e.g. in opposite directions), the cells 122 open to expand the structure radially. Not all of the longitudinal struts 124 must move; alternate longitudinal

struts 124 may be moved while the other struts remain stationary. The relative movement of the longitudinal struts 124 provides the expansion of the cells 122 and the expandable tubular 120. This type of cell is an example of an expandable cell that is not bistable.

[0056] A locking mechanism 128 may be used to maintain the expanded position of the expandable tubular 120. As shown in Figures 22A-B, the expandable tubular may comprise one or more locking mechanisms 128 spaced along the length of the expandable tubular 120 and spaced radially about the expandable tubular 120. One embodiment of the locking mechanism is shown in Figures 23A-B. In the embodiment shown, the locking mechanism 128 comprises a detent (or finger) 130 extending from one longitudinal strut 124 and cooperating with a set of ratchet teeth 132 provided on another longitudinal strut 124. The ratchet teeth 132 extend from a ramp area 134 of the longitudinal strut 124 to accommodate for the relative movement of the detent 130 to the longitudinal strut 124 having the ratchet teeth 132. The ratchet teeth 132 generally allow movement of the detent 130 thereon in a first direction associated with the expansion of the expandable tubular 120, and prevent movement of the detent 130 in the opposite direction. Once in the expanded position, the detent 130 acts as a locked strut preventing retraction of the expandable tubular 120. To increase the structural integrity of the expanded tubular 120 and to resist forces tending to move the expandable tubular 120 from an expanded state or position to a reduced position. The expandable tubular 120 may include a plurality of locking mechanisms 128.

[0057] Although shown as a ratchet, as an alternative the locking mechanism may have fewer discrete positions, such as one, in which the detent locks in the fully expanded position only. In another embodiment the detent may comprise a resilient finger biased toward an extended position that snaps into a groove in an adjacent longitudinal strut 124. Likewise, the adjacent struts 124 may each have resilient detents that cooperate to lock the device in the expanded position only upon the tubular 120 achieving the expanded position. These are only a few examples of the many possible alternatives for the locking mechanism 128.

[0058] Also, various other tubular expansion mechanisms and expandable cells may be utilized such expandable tubulars and other devices. For example, details of one type of expandable cell are illustrated in Figures 24A, 24B, 25A and 25B. In this embodiment, as in other embodiments, the cell is transitioned from a compressed state to an expanded state.

[0059] During movement from the compressed state to the expanded state and depending upon the environmental conditions as well as the materials used, material thickness and other design parameters of the cell and devices formed from the cell, some areas of the cell and struts may experience plastic deformation. In Figures 24A, 24B, 25A and 25B alternative embodiments of a

cell are illustrated in compressed and expanded states. In these embodiments, one of the struts 21 (shown as the thinner, upper strut) has thinned portions 140 that serve as flexible hinges or joints. The thinned portions 140 are preferably placed at areas where plastic deformation of the strut is likely to occur as the strut moves from a compressed to an expanded state. Thus, for example, the thinned portions 140 may be placed near the intersection of the struts 21, 22 to provide an area that is less susceptible to plastic deformation. Although the figures show a plurality of thinned portions 140, the strut may include a single thinned portion 140, for example, at an area of increased plastic deformation. Also, the thinned portions 140 may be placed in other positions along the struts 21, 22 for other purposes. The thinned areas 140 define linkages 142 therebetween that comprise portions which are generally thicker than the thinned portions 140. Placing a plurality of thinned portions 140 along the length of a strut 21, 22 produces a plurality of linkages 142.

[0060] Another factor in determining the positioning of the thinned portions 140 is the number, placement, and design of the linkages. Although shown in the figures as having a uniform thickness, the linkages 142 may also have a variation in thickness to further tailor the expansion, contraction, and other characteristics of the cell as desired. Therefore, in one broad aspect of the inventions, at least one of the struts 21, 22 has a thickness that varies. Also, other factors may be considered in placement of the thinned portions 140 and the thickness variations of the struts 21, 22. Also, the thinned portions may occur at the intersection of the struts 21, 22.

[0061] In Figures 24A and 24B a cell with three linkages 142 is illustrated; and in Figures 25A and 25B a cell with two linkages is illustrated. Although Figures 24A-25B disclose only a single cell, the cells may be incorporated into a tool, such as a tube, having a plurality of cells such as that shown in Figures 4A and 4B. The figures illustrate a single cell to more clearly show the basic concept and the cell design. The handles shown in the figures are not a part of the cell structure, but are merely used on test cells to facilitate testing of the cells.

[0062] Referring generally to Figures 26A and 26B, another embodiment of expandable cells, labeled as expandable cells 150, is illustrated. Each expandable cell 150 comprises a thick strut 152 and one or more thin struts 154, e.g. two thin struts 154. In the embodiment illustrated, each expandable cell 150 comprises a pair of thin struts, and each thin strut 154 has a pair of ends 156 pivotably coupled to adjacent thick struts, respectively. Ends 156 may comprise pins that are pivotably received in corresponding sockets 158.

[0063] As the plurality of expandable cells 150 is moved from the contracted state illustrated in Figure 26A to the expanded state illustrated in Figure 26B, thin struts 154 deform sufficiently to permit pivoting of pins 156 in their corresponding sockets 158. As illustrated best in Figure 26B, the pairs of thin struts 154 that form

each cell 150 have outlying ends 156 pivotably coupled to upper attachment regions 160 of the lower thick strut 152. The opposite ends of each pair of thin struts 154 are pivotably coupled to a lower attachment region 162 of the next upwardly adjacent thick strut 152. It should be noted that positional terms such as upper and lower or merely used to facilitate explanation of the location of various features relative to the figures provided and should not be construed as limiting.

[0064] In another embodiment illustrated in Figures 27A and 27B, a plurality of expandable cells, labeled with reference numeral 164, each comprise a thick strut 166 and one or more thin struts 168. Each thick strut 166 is generally arcuate and connected to a corresponding thin strut 168 at a fixed connection region 170 disposed at a generally central location along the outer or convex portion of the arcuate thick strut. The outer ends of each thin strut 168 are pivotably coupled to the next adjacent thick strut 166 via a pivot connection 172 that may comprise a ball and socket.

[0065] As the plurality of cells are moved from the contracted state illustrated in Figure 27A to the expanded state illustrated in Figure 27B, thin struts 168 flex or deform as their outer ends pivot at each pivot connection 172. As with many of the other cells described herein, when the thin struts 168 move past their point of greatest flexure, the stored spring energy tends to force the cells 164 to their stable expanded state illustrated in Figure 27B. Thus, as with the bistable cells illustrated in Figures 26A and 26B, cells 164 move between a stable contracted state and a stable expanded state.

[0066] Another expandable cell embodiment is illustrated in Figures 28A and 28B. In this embodiment, each expandable cell 174 is formed of a thick strut 176 and a thin strut 178. Each thin strut 178 has a pair of ends 180 that are pivotably coupled to a thick strut. For example, a given thick strut may comprise a pair of sockets 182 to pivotably receive pin or ball shaped ends 180. Additionally, thin strut 178 is fixedly coupled to adjacent thick struts 176 in an alternating pattern. For example, each cell in the illustrated embodiment comprises three fixed couplings 184 that alternate between adjacent thick struts 176. With this design, the expandable cells 174 again are movable between a stable contracted state as illustrated in Figure 28A and a stable expanded state as illustrated in Figure 28B.

[0067] With reference to Figures 29A and 29B, another expandable cell design is illustrated. In this embodiment, each of a plurality of expandable cells 186 comprises a thick strut 188 and at least a pair of stacked thin struts 190, 192, respectively. Thin struts 190, 192 are generally disposed in a stacked orientation and connected by a linking member 194. Thin strut 192 comprises a pair of ends 196 affixed to a corresponding thick strut 188. An intermediate connection region 198 of thin strut 192 is affixed to the next adjacent thick strut 188, as best illustrated in Figure 29B. Thin strut 190, on the other hand, has unattached ends 200. Ends 200 are

captured in an abutting engagement with a notched region 202 formed in the same thick strut 188 to which ends 196 are affixed. As the plurality of expandable cells 186 are moved from the contracted state illustrated in Figure 29A to the expanded state illustrated in Figure 29B, each pair of thin struts 190 and 192 deforms to a deflection point where stored energy in the thin struts is maximized. As the thin struts are moved past this deflection point, the stored energy is released to facilitate expansion of the cells to their expanded state.

[0068] Of course, with any of these types of bistable cells, the degree of expansion may be limited by an external barrier. For example, if the bistable cells are used to form a tubular, the tubular may be expanded against a wellbore wall that prevents the cells from moving to their fully expanded condition. Typically, the size of the tubular is selected to permit expansion of the cells at least past the point of maximum deformation. Thus, depending on the material used, the cells may actually cooperate to apply an outwardly directed radial force against the wellbore wall.

[0069] Referring generally to Figures 30A and 30B, another expandable cell design is illustrated. Each expandable cell 204 comprises a pair of arcuate thin struts 206 pivotably coupled to a corresponding thick strut 208 at a generally centralized extended region 210 via pivot ends 212. Generally opposite pivot ends 212, thin struts 206 comprise outer pivot ends 214 that are pivotably coupled to the next adjacent thick strut 208. Pivot ends 212 and 214 can be formed in a variety of configurations, such as ball joints, pin joints, etc. Removal of each thin strut 206 is prevented by appropriate ligaments 216 and 218 disposed at pivot ends 212 and 214, respectively. The ligaments 216 and 218 are coupled between the thin strut 206 and the corresponding thick struts 208.

[0070] In Figures 31A-31C, a different type of expandable cell 220 is illustrated. In this embodiment, a thick strut 222 is coupled to one or more thin struts 224 by one or more spring elements 226. In the particular embodiment illustrated, two spring elements 226 are formed generally in the shape of a horn, with the base of each horn connected to thick strut 222 and the tip of each horn coupled to the adjacent thin strut 224. In this embodiment, a thin strut 224 is connected to each spring element 226 by a flexible hinge 228. The two thin struts 224 are coupled to each other through a center beam 230 and a pair of flexible hinges 232.

[0071] As cells 220 are expanded from a contracted state, illustrated in Figure 31A, to an expanded state, illustrated in Figure 31C, spring elements 226 flex outwardly and store spring energy. With this design, thin struts 224 typically do not undergo substantial deformation during movement from the contracted state to the expanded state. Rather, spring elements 226 are elastically deformed as they are forced outwardly during movement of center beam 230 from the contracted state to the expanded state. When spring elements 226 are flexed outwardly, they store spring energy at least to the

point of maximum flexure illustrated in Figure 31B where thin struts 224 are generally parallel with thick strut 222. Once center beam 230 moves past this point of maximum stored spring energy, spring elements 226 tend to release the stored energy and move inwardly, thereby forcing thin struts 224 and center beam 230 to the expanded position illustrated best in Figure 31C. Deformation of hinges 228 and 232 facilitates the pivoting of thin struts 224 from the contracted state to the expanded state.

[0072] A double horn cell design is illustrated in Figures 32A and 32B. In this design, a plurality of thick struts 236 are coupled together via thin struts 238 and horn spring members 240. Specifically, each thin strut 238 is coupled to two horn spring members 240 to permit storage of a greater amount of energy. This greater energy storage provides added positive energy for opening cells 234 to their expanded positions as illustrated in Figure 32B.

[0073] In the example illustrated, each double horn cell 234 has two outer horn spring members 240, coupled to one thick strut 236, and two inner horn spring members 240, coupled to the next adjacent thick strut 236. One thin strut 238 is coupled to each cooperating pair of inner and outer horn spring members via appropriate hinge regions 242. Thus, as the double horn cells 234 are moved from the contracted state illustrated in Figure 32A to the expanded state illustrated in Figure 32B, cooperating pairs of inner and outer horn spring members 240 are flexed outwardly to a point at which the thin struts 238 are generally aligned. Subsequent to this point of expansion, the horn spring members 240 begin to release the stored spring energy and force thin struts 238 towards the fully expanded state.

[0074] Other forms of spring elements also may be utilized in facilitating expansion of a variety of cell types. For example, in Figure 33 an expandable cell 244 is illustrated in which adjacent thick struts 246 are coupled to a thin strut 248 by a different type of spring members 250. Spring members 250 may be coiled, undulating or arranged along other paths that accommodate the transitioning of thin strut 248 from the contracted state illustrated in Figure 33 to an expanded state.

[0075] Another type of spring system is illustrated in Figure 34 as an expandable cell 252. A pair of thick struts 254 are coupled by a pair of undulating thin struts 256. The design of thin struts 256 incorporates a plurality of spring elements 258 that both accommodate flexure of the thin struts 256 and expansion of the cell 252 by storing and then releasing spring energy. The spring energy is released as the thin struts transition past a point of maximum flexure towards the fully expanded state.

[0076] To secure the overall device, e.g. tubular, in the expanded position, a locking mechanism may be utilized to prevent the individual cells from contracting. Exemplary locking mechanisms may be associated with individual cells, or they may be located at one or more

positions along the expandable device. In Figures 35A-35D, one type of locking mechanism 258 is illustrated. In this embodiment, a post 260 is slidably received in a corresponding recess 262. A ratchet finger 264 extends generally transversely towards post 260. Specifically, ratchet finger 264 comprises an engagement end 266 that resides in a recessed area 268 of post 260 when the overall device and locking mechanism 258 are in a contracted state, as illustrated in Figure 35A.

[0077] As the device, e.g. tubular, is expanded, ratchet finger 264 is flexed away from an adjacent support surface 270, as illustrated best in Figure 35D. The ratchet finger 264 continues to slide along the side of post 260 as the device is expanded to a maximum degree illustrated in Figure 35C. When the expansion force is relaxed, any substantial movement of post 260 towards the contracted position is blocked by ratchet finger 264, as illustrated in Figure 35D. As post 260 attempts to move towards its contracted state, engagement end 260 is pressed firmly into interfering engagement with the side of post 260. Additionally, support surface 270 limits the movement of ratchet finger 264 in the contracting direction. The side wall of post 260 may comprise teeth or other interfering features that aid in preventing movement of post 260 back towards the contracted state.

[0078] Another exemplary locking mechanism 272 is illustrated in Figures 36A-36D. In this embodiment, a fork ratchet 274 is formed in the expandable device, such as in the wall of an expandable tubular. Fork ratchet 274 comprises a pair of prongs 276 that each have a divergent end 278. In the contracted state, prongs 276 are received in an opening 280 having a generally hourglass shape profile. In other words, divergent ends 278 reside in a divergent or expanded portion 282 of opening 280 and must be pulled through a narrow or constricted portion 284 when the device is expanded.

[0079] During expansion of the tubular or other device, divergent portions 282 are drawn through constricted region 284 (see Figures 36B and 36C.) Once prongs 276 are drawn clear of opening 280, the divergent portions 282 once again spring outwardly to their normal position. In this position, divergent portions 282 are wider than the entrance to opening 280, and fork ratchet 274 is prevented from reentering opening 280. Thus, the overall device is held in its expanded state.

[0080] Another exemplary locking mechanism 284 is illustrated in Figure 37. Locking mechanism 284 is designed for use with horn style cells. In the specific example illustrated, a slot 286 is formed between a pair of spring member horns 288 within a thick strut 290 of an expandable cell 292. A wedge 294 extends from an adjacent thick strut 296 into slot 286. As cell 292 is expanded, wedge 294 is drawn outwardly through slot 286. The size of the wedge tip 298 and slot outlet 300 are selected to interfere when cell 292 is in its expanded state. This prevents flexing of horns 288 towards slot 286 and thereby inhibits collapse of the expanded cell.

[0081] Referring generally to Figures 38A-41B, a va-

riety of expandable cell and locking mechanism combinations are illustrated. With specific reference to Figures 38A and 38B, one embodiment of an expandable cell 302 comprises thick struts 304 that are coupled together by thin struts 306 via spring members 308. Each thick strut 304 comprises one or more, e.g. two, ratchet fingers 310 that slide along a corresponding ratchet surface 312 formed on expanded regions of the thin struts 306 (see Figure 38B).

[0082] Ratchet surface 312 may incorporate ratchet teeth to engage the end of the corresponding ratchet finger 310. As the expandable cell 302 is transitioned from its contracted state, as illustrated in Figure 38A, to an expanded state, as illustrated in Figure 38B, ratchet fingers 310 are flexed away from a support surface 314 while sliding along corresponding ratchet surfaces 312. The ends of the ratchet fingers 310 do not allow sliding motion of corresponding ratchet surfaces 312 back towards the contracted state. Furthermore, support surfaces 314 may be relied on to limit any flexing of fingers 310 back towards the contracted position. Thus, when the expandable cell in its expanded state, each of the ratchet fingers 310 acts against a corresponding ratchet surface 312 to support the cell against collapse.

[0083] Another embodiment of the system is illustrated in Figure 39 and utilizes fingers in the form of ratchet pawls 316. In this embodiment, each ratchet pawl is formed in an appropriate thick strut 304 by creating an open area 318 configured to receive a corresponding portion 320 of thin strut 306 when in the contracted position. Each ratchet pawl 316 may comprise a plurality of teeth 322 positioned to engage corresponding teeth 324 extending from portion 320. Additionally, a relief cut 326 may be formed along ratchet pawl 316 generally opposite open area 318. Relief cut 326 allows ratchet pawl 316 to flex as teeth 322 are dragged past teeth 324 during transition of the cell from a contracted state to an expanded state. Teeth 322 and 324 are designed to prevent closure of the cell once expansion begins. Thus, the ratchet pawl 316 effectively ratchets along portion 320 holding the cell at each additional degree of expansion. As an alternative to teeth, the ratchet pawl 316 and cooperating portion 320 may utilize other types of interfering features to prevent contraction of the cell.

[0084] The locking mechanisms also may be used in cooperation with expandable cells that are not necessarily bistable cells. For example, in Figure 40A an expandable cell 330 comprises a thin strut 332 disposed in an expandable "wishbone" type configuration between the thick struts 334 to which it is connected. A locking mechanism 336 cooperates with one or more of the expandable thin struts 332 to hold the expandable cells 330, at an expanded position. As illustrated in Figure 40B, a locking mechanism 336 may be combined with each expandable cell 330, or there may be multiple expandable cells for each locking mechanism 336.

[0085] In this embodiment, locking mechanism 336 comprises a post 338 having external teeth 340. Post

338 is slidably received within an opening 342 defined by one or more flexible fingers 344 having engagement tips 346 that engage teeth 340. Fingers 344 flex outwardly to allow teeth 340 to slide past engagement tips 346 as the cell is expanded, but engagement tips 346 prevent post 338 from moving in a direction towards the contracted state. Thus, once expandable cell 330 is expanded, locking mechanism 336 prevents contraction of the cell.

[0086] A similar design is illustrated in Figures 41A and 41B. This design combines the expandable cell described with reference to Figure 40A and a locking mechanism of the type described in Figures 36A-36D. Thus, as the plurality of expandable cells 330 are moved from the contracted state illustrated in Figure 41A to the expanded state illustrated in Figure 41B, the wishbone style thin strut is expanded. Simultaneously, prongs 276 are pulled from their corresponding opening 280 to a position that prevents reentry of fork 274 into opening 280. The locking mechanism may be designed such that prongs 276 are withdrawn from and blocked from reentering opening 280. Alternatively, prongs 276 may be designed for interference with corresponding teeth or other interfering features 350 disposed along the outer limit of each opening 280 to prevent return movement of prongs 276 into opening 280.

[0087] It also should be noted that expandable devices, such as expandable tubulars, can be formed with a variety of cells and locking mechanisms having differing configurations, such as changes in size or type, as illustrated schematically in Figure 42. For example, by stacking cells of different length or eccentric offset in a sheet or tube, it is possible to design an opening bias into the structure. The expandable device may be designed to allow certain rows of cells to open prior to other rows of cells or for the cells to open in a predetermined pattern or at a predetermined rate. In Figure 42, for example, an expandable device 352 comprises rows of expandable cells 354. However, different rows 354 have cells of differing lengths, e.g. cells 356, 358 and 360. This allows certain rows of cells to open prior to adjoining rows of cells, because, at least with certain cell designs, the length of the cell affects the force required to expand the cell. Incorporating different rows of cells into an expandable device allows the user to know the rate of expansion for a given deployment force and facilitates the design of devices having cells which open in a predetermined sequence. Additionally, the use of different types of cells can improve compliance of the expandable device when the deployment force is not uniform along the length of the device.

[0088] It will be understood that the foregoing description is of exemplary embodiments of this invention, and that the invention is not limited to the specific forms shown. For example, the expandable cells can be combined into a variety of tubulars and other expandable structures; the size and shape of the expandable cells and locking mechanisms can be adjusted; the types of

material utilized can be changed depending on the specific application; and a variety of mechanisms may be used to expand the cells. Also, the various cells can be formed by a variety of techniques including laser cutting, jet cutting, water jet cutting and other formation techniques. These and other modifications may be made in the design and arrangement of the elements without departing from the scope of the invention as expressed in the appended claims.

Claims

1. An expandable device, comprising:

an expansion member having a plurality of cells that are expandable from a closed position to an open position, each cell having a thin strut pivotably coupled to a thick strut.

2. The expandable device as recited in claim 1, wherein the thin strut and the thick strut of each cell are pivotably coupled by a pin joint.

3. The expandable device as recited in claim 1, wherein the thin strut and the thick strut of each cell are pivotably coupled by a ball and socket joint.

4. The expandable device as recited in claim 1, wherein the thin strut is coupled between a fixed end and a pivotable end.

5. The expandable device as recited in claim 1, wherein the expansion member comprises a tubular that undergoes radial expansion during expansion of the plurality of cells.

6. An expandable device, comprising:

an expansion member having a plurality of cells that are expandable from a closed position to an open position, each of the plurality of cells comprising a thick strut, a first thin strut and a second thin strut.

7. The expandable device as recited in claim 6, wherein the first thin strut is physically connected to the second thick strut and the second thin strut is disposed in abutting engagement with the thick strut.

8. The expandable device as recited in claim 6, wherein the first thin strut and the second thin strut are generally parallel.

9. The expandable device as recited in claim 6, wherein the first thin strut is longer than the second thin strut.

10. The expandable device as recited in claim 6, wherein the expansion member comprises a tubular.

11. An expandable device, comprising:

an expansion member having a plurality of cells that are expandable from a closed position to an open position, each of the plurality of cells comprising a spring member to hold the cell in the open position.

12. The expandable device as recited in claim 11, wherein the spring member comprises a horn.

13. The expandable device as recited in claim 11, wherein the spring member comprises a pair of horns.

14. The expandable device as recited in claim 13, wherein a thin strut and a thick strut extend between the pair of horns.

15. The expandable device as recited in claim 11, wherein each cell comprises a double horn cell.

16. The expandable device as recited in claim 11, wherein each spring member comprises an undulating spring member.

17. The expandable device as recited in claim 11, wherein the expandable member comprises a tubular that undergoes radial expansion during expansion of the plurality of cells.

18. An expandable device, comprising:

an expansion member having a plurality of cells that are expandable from a closed position to an open position, each of the plurality of cells comprising a thick strut and a thin strut, the thin strut having a plurality of flexible joints.

19. The expandable device as recited in claim 18, wherein each flexible joint comprises a thinned region.

20. The expandable device as recited in claim 19, wherein each thinned region undergoes plastic deformation during expansion from the closed position to the open position.

21. The expandable device as recited in claim 18, wherein the expansion member comprises a tubular.

22. An expandable device, comprising:

an expansion member having a plurality of cells

that are expandable from a closed position to an open position, each cell having a thin strut coupled to a thick strut by a ligament.

23. The expandable device as recited in claim 21, wherein the thin strut and the thick strut of each cell are pivotably coupled by a pin joint.
24. The expandable device as recited in claim 21, wherein the thin strut and the thick strut of each cell are pivotably coupled by a ball and socket joint.
25. The expandable device as recited in claim 21, wherein the thin strut is coupled between a fixed end and a pivotable end.
26. A method of expanding a device, comprising:

creating a plurality of bistable cells in a wall of the device by coupling thin struts to corresponding thick struts through hinge joints; and

applying an expansion force to the wall in a direction that transitions the plurality of bistable cells from a contracted state to an expanded state.
27. The method as recited in claim 26, further comprising forming a plurality of locking mechanisms in the wall.
28. The method as recited in claim 26, wherein creating comprises coupling each thin strut to a corresponding thick strut through a pivotable hinge joint.
29. The method as recited in claim 26, wherein creating comprises coupling each thin strut to a corresponding thick strut through a flexible hinge joint.
30. The method as recited in claim 26, wherein creating comprises coupling each thin strut to a corresponding thick strut by a hinge joint having a plastically deformable thinned region.
31. The method as recited in claim 26, wherein creating comprises creating the plurality of bistable cells in a tubular.
32. The method as recited in claim 31, wherein applying comprises applying a force in a radially outward direction.
33. The method as recited in claim 26, further comprising coupling at least one thin strut to the at least one thick strut by a spring member.
34. The method as recited in claim 26, further comprising coupling at least one thin strut to the at least one

thick strut by a horn spring member.

35. An apparatus, comprising:

an expandable member having a plurality of cells that are expandable from a closed position to an open position, the plurality of cells comprising cells of differing sizes.

36. The apparatus as recited in claim 35, wherein the expandable member comprises a tubular.

37. An apparatus, comprising:

an expandable member having a plurality of cells that are expandable from a closed position to an open position, the plurality of cells comprising cells of differing configurations.

38. The apparatus of claim 37, wherein the expandable member comprises a tubular.

39. An expandable device for use in a wellbore environment, comprising:

a plurality of expandable cells; and
a locking mechanism to hold the plurality of cells in an expanded state.

40. The expandable device as recited in claim 39, wherein the locking mechanism comprises a ratchet mechanism.

41. The expandable device as recited in claim 39, wherein the plurality of cells comprises bistable cells.

42. The expandable device as recited in claim 39, wherein each cell of the plurality of cells comprises a thick strut and a thin strut.

43. The expandable device as recited in claim 39, wherein the plurality of expandable cells are arranged in a tubular.

44. The expandable device as recited in claim 40, wherein the ratchet mechanism comprises a finger ratchet.

45. The expandable device as recited in claim 40, wherein the ratchet mechanism comprises a fork ratchet.

46. The expandable device as recited in claim 40, wherein the ratchet mechanism comprises a wedge.

47. The expandable device as recited in claim 39,

wherein each cell of the plurality of cells comprises a wishbone cell.

48. The expandable device as recited in claim 39, wherein the plurality of expandable cells comprises expandable cells of differing sizes.

49. The expandable device as recited in claim 39, wherein the ratchet mechanism comprises a ratchet pawl and corresponding teeth.

50. The expandable device as recited in claim 39, wherein the locking mechanism comprises a plurality of locking mechanisms in which an individual locking mechanism is associated with each expandable cell.

51. A method of expanding a device, comprising:

forming a plurality of expandable cells in a wall of the device;
expanding the plurality of expandable cells; and
locking the plurality of expandable cells in an expanded position with a locking mechanism formed in the wall.

52. The method as recited in claim 51, wherein locking comprises holding the plurality of cells in an expanded position with a plurality of ratchet fingers.

53. The method as recited in claim 52, wherein locking comprises holding the plurality of cells in an expanded position with a plurality of locking posts.

54. The method as recited in claim 51, wherein locking comprises holding the plurality of cells in an expanded position with a plurality of fork ratchets.

55. The method as recited in claim 51, wherein forming comprises forming the plurality of expandable cells in a tubular.

56. The method as recited in claim 51, wherein forming comprises forming a plurality of bistable expandable cells.

57. A system for expanding a tubular member, comprising:

means for creating a plurality of bistable cells in a wall of the tubular;
means for expanding the plurality of bistable cells from a contracted state towards an expanded state; and
means for preventing the plurality of bistable cells from returning to the contracted state.

58. The system as recited in claim 57, wherein the

means for creating comprises a desired cell profile formed through the wall.

59. The system as recited in claim 57, wherein the means for expanding comprises a plurality of flexible thin struts.

60. The system as recited in claim 57, wherein the means for expanding comprises a plurality of spring members.

61. A method of expanding a tubular, comprising:

providing a tubular with a plurality of cells disposed along longitudinal struts; and
moving at least two longitudinal struts longitudinally with respect to each other to expand the tubular.

62. The method as recited in claim 61, further comprising locking the tubular in an expanded state.

63. The method as recited in claim 62, wherein locking comprises engaging a finger portion of one longitudinal strut with one or more ratchet teeth disposed on another longitudinal strut.

64. The method as recited in claim 61, further comprising forming each of the plurality of cells with a thin strut extending between adjacent longitudinal struts.

65. An expandable device for use in a wellbore, comprising:

a tubular having a plurality of longitudinal struts and a plurality of thin struts connecting the longitudinal struts, wherein relative longitudinal movement of the longitudinal struts causes radial expansion of the tubular.

66. The expandable device as recited in claim 65, further comprising a locking mechanism to hold the tubular in an expanded state.

67. The expandable device as recited in claim 65, wherein the locking mechanism comprises a ratchet mechanism.

68. The expandable device as recited in claim 67, wherein each ratchet mechanism comprises a finger member and a plurality of ratchet teeth disposed on adjacent longitudinal struts.

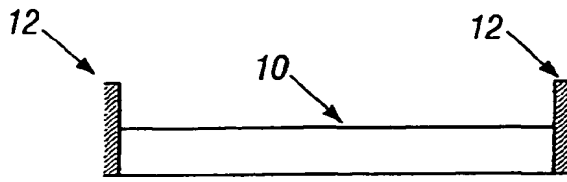


FIG. 1A

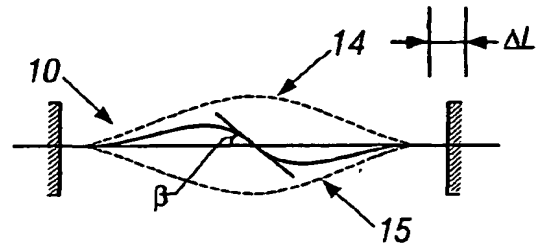


FIG. 1B




FIG. 2A

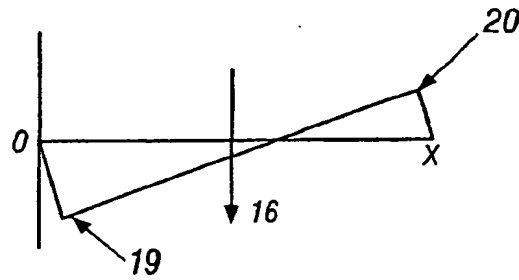


FIG. 2B




FIG. 3A




FIG. 3B




FIG. 3C




FIG. 3D




FIG. 3E




FIG. 3F

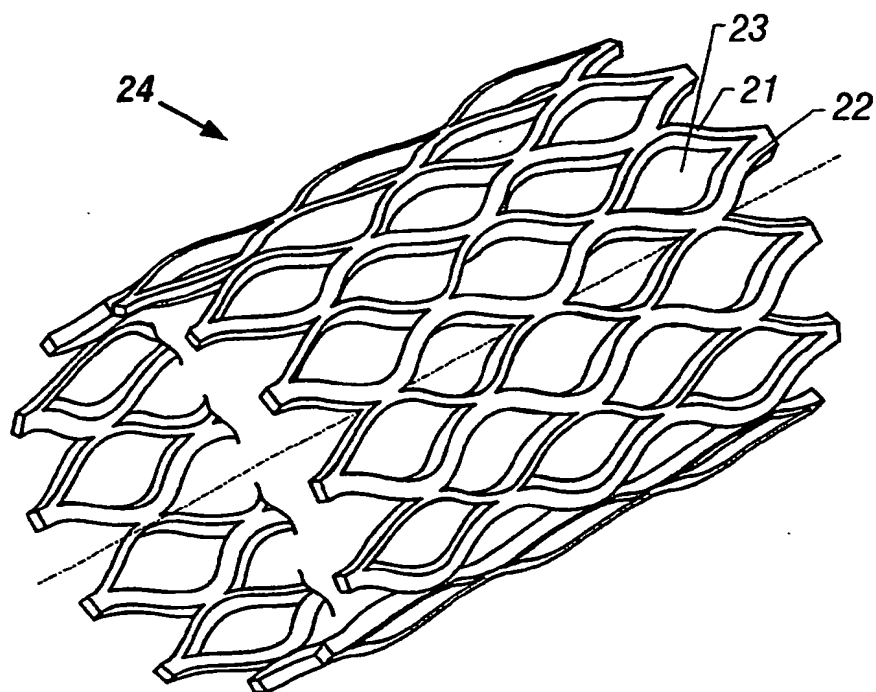


FIG. 4A

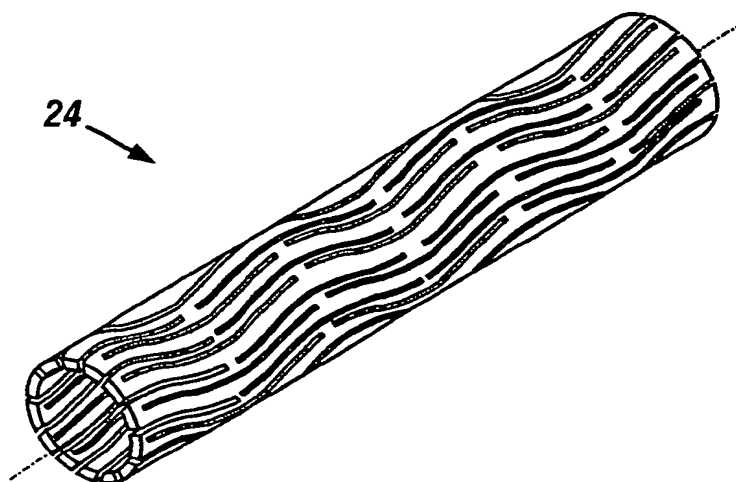
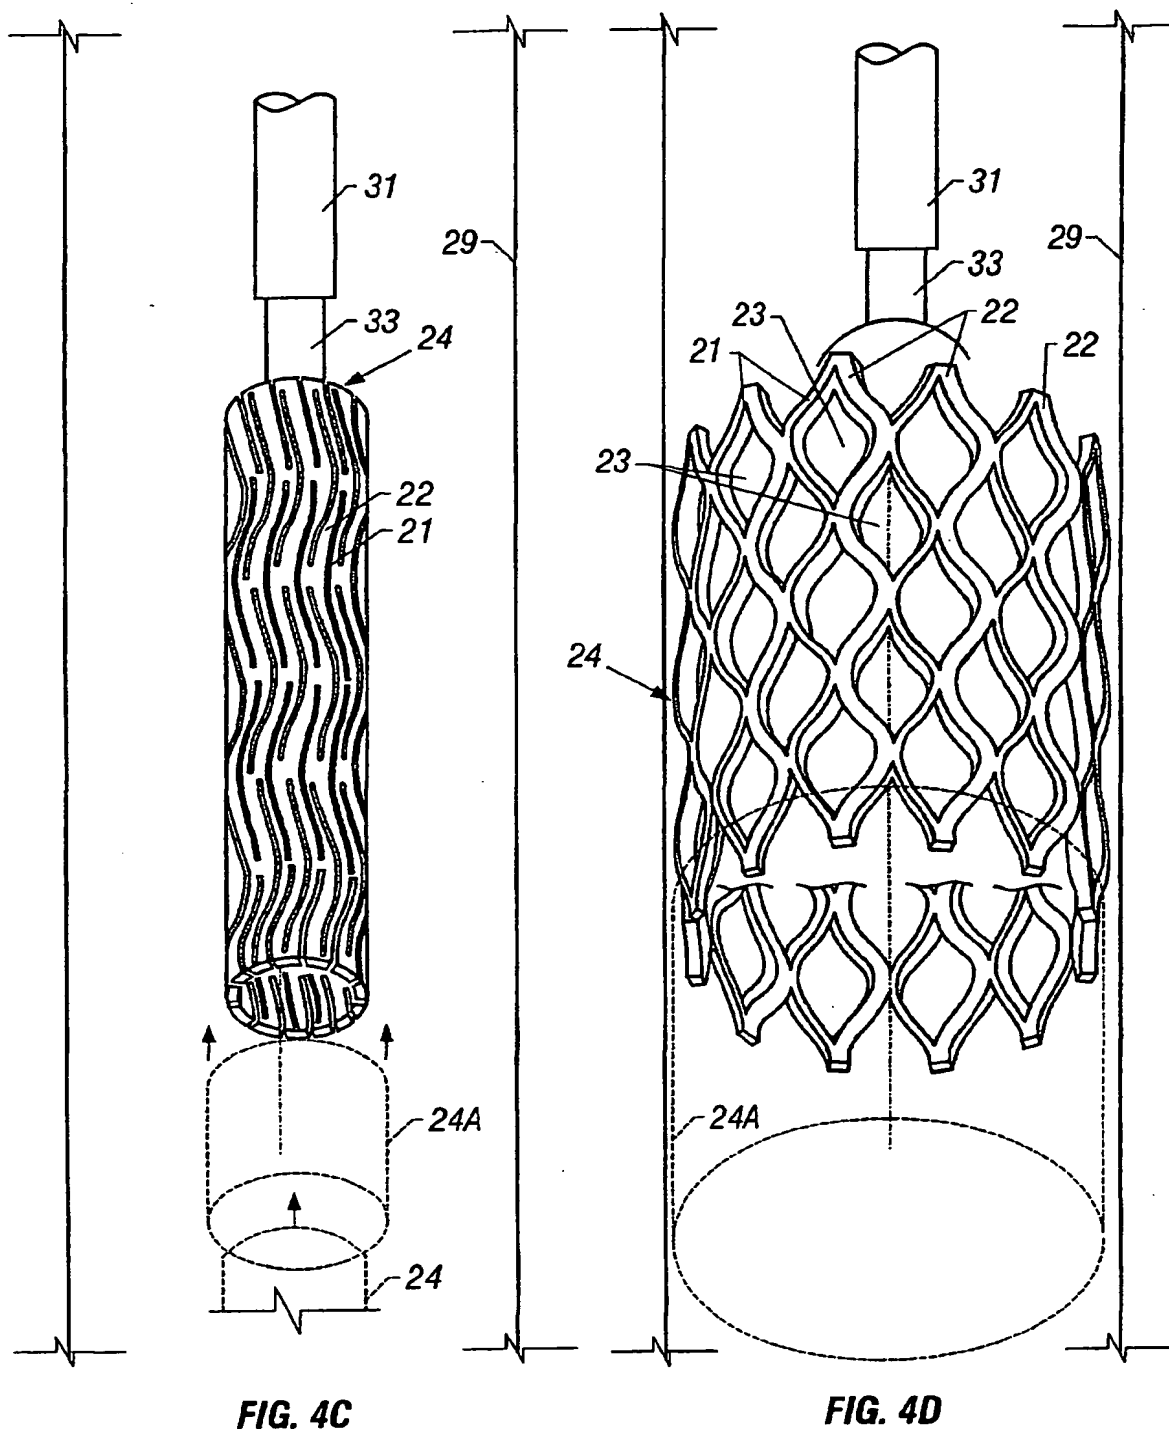


FIG. 4B



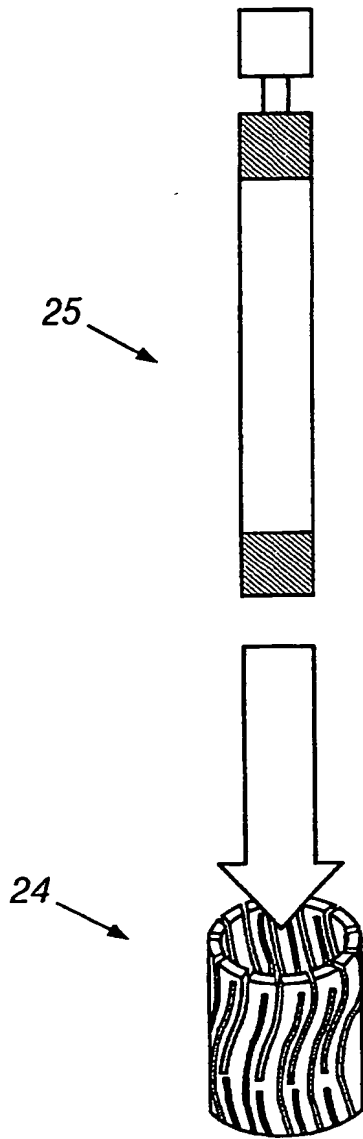


FIG. 5A

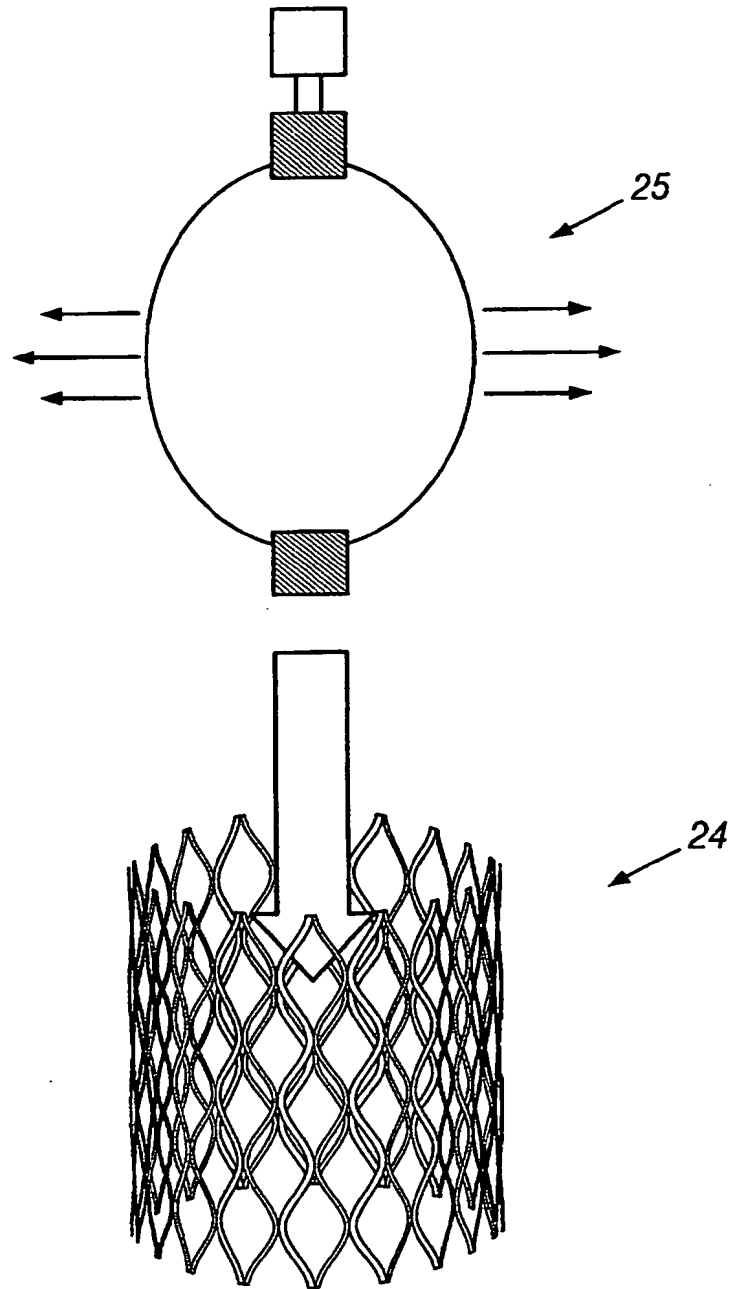


FIG. 5B

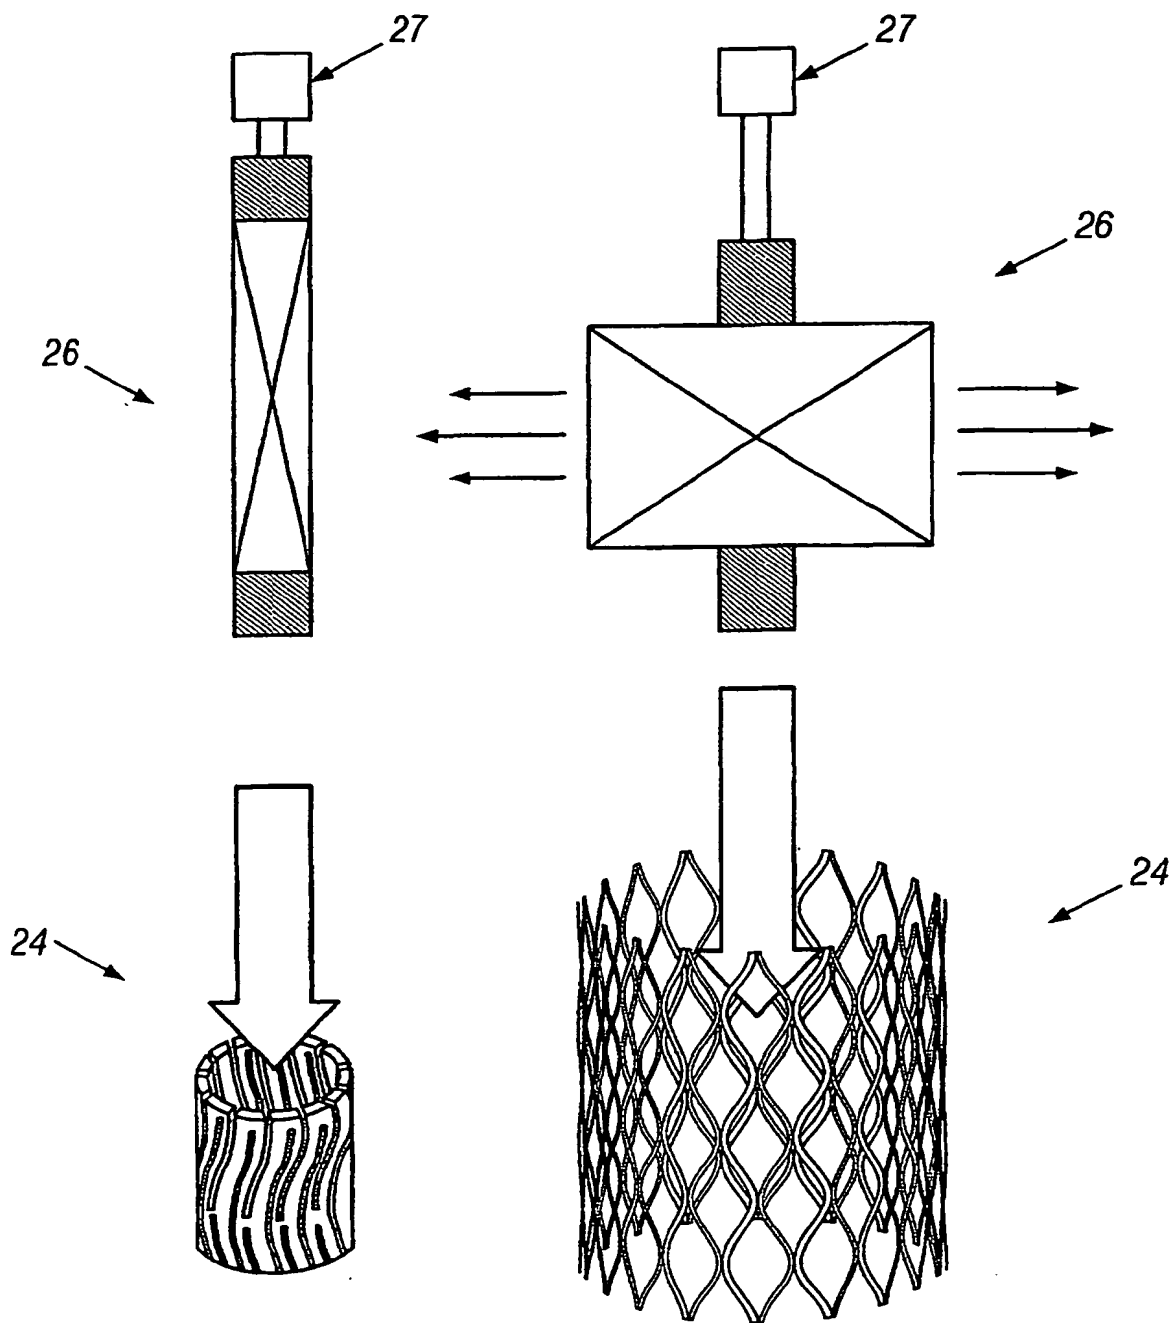


FIG. 6A

FIG. 6B

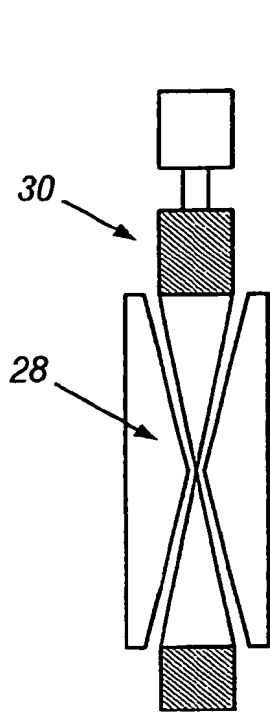


FIG. 7A

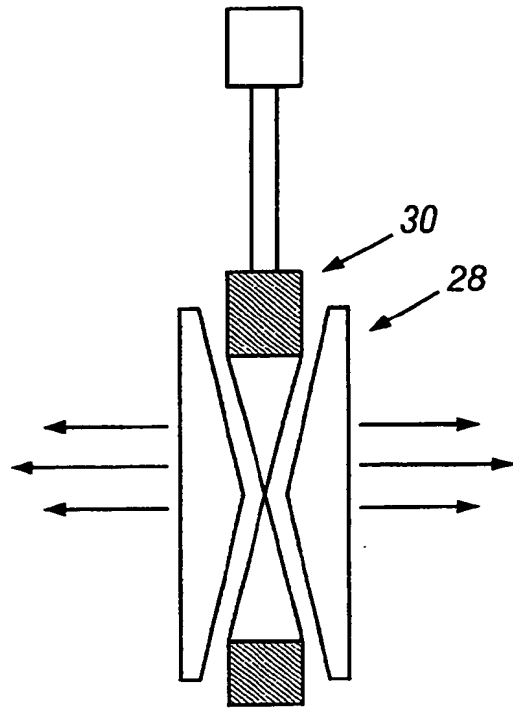


FIG. 7B

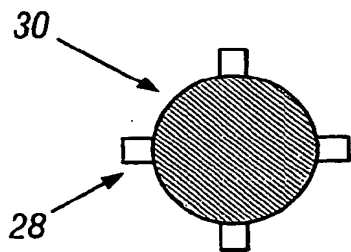


FIG. 7C

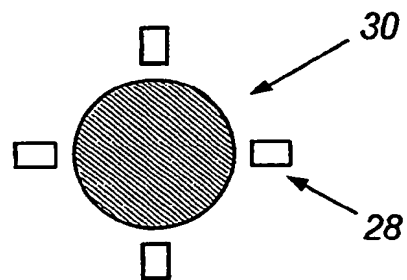


FIG. 7D

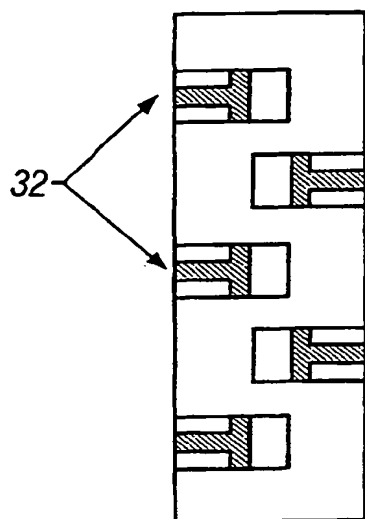


FIG. 8A

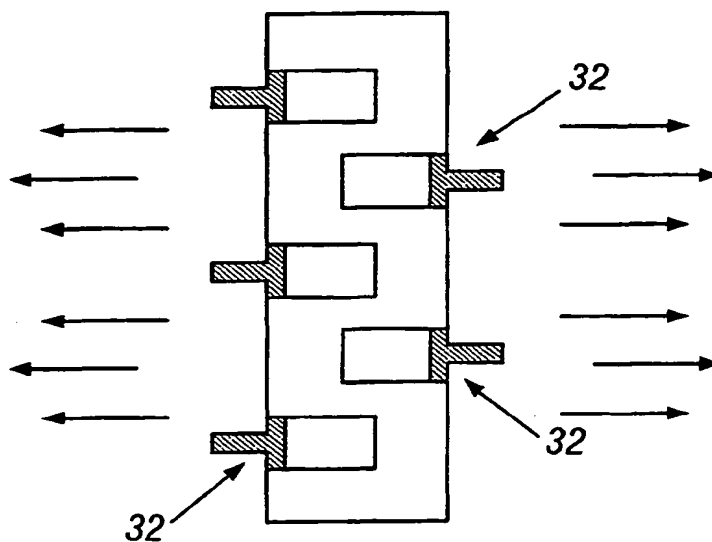


FIG. 8B

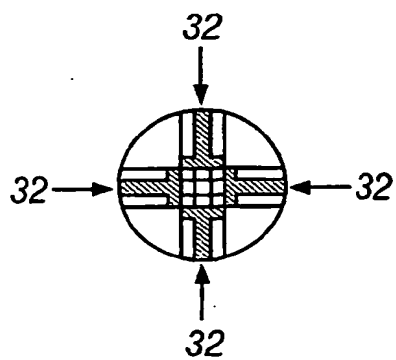


FIG. 8C

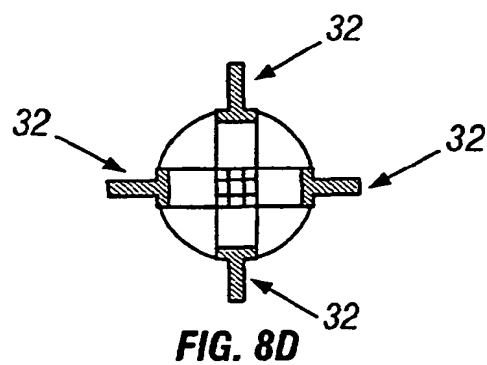


FIG. 8D

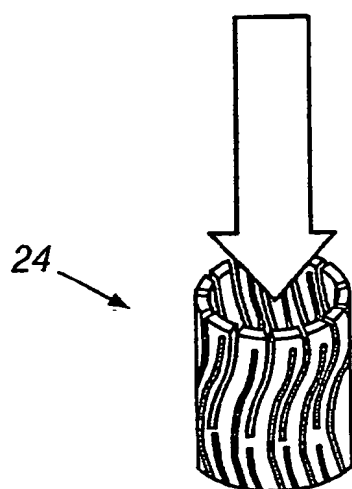
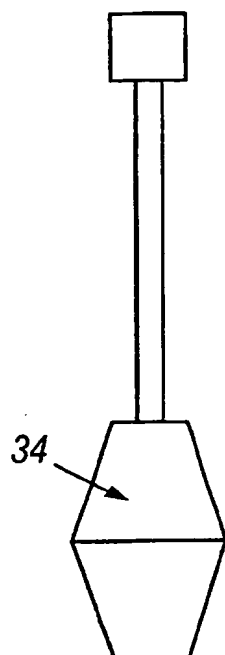


FIG. 9A

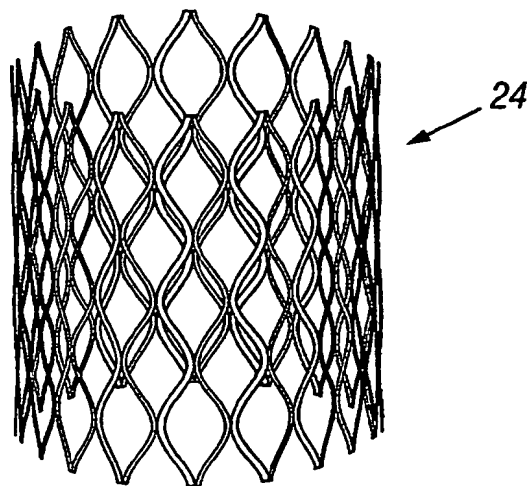


FIG. 9B

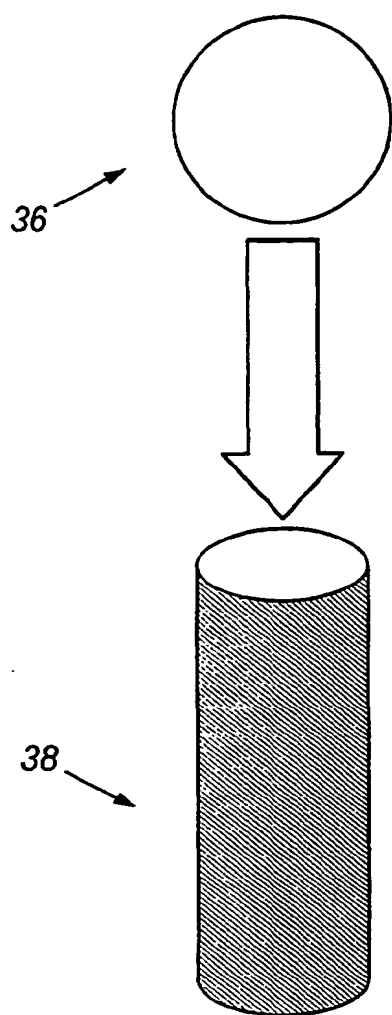


FIG. 10A

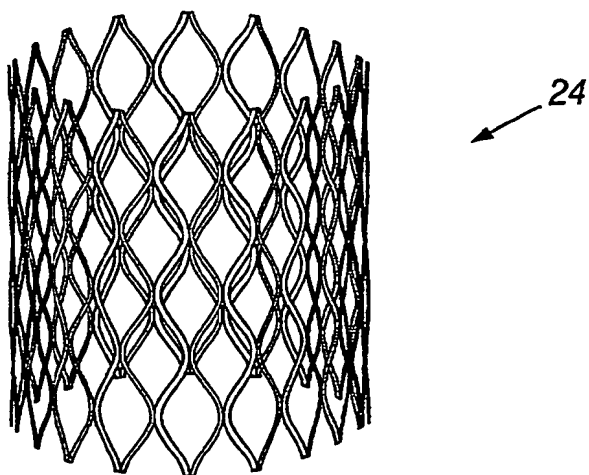
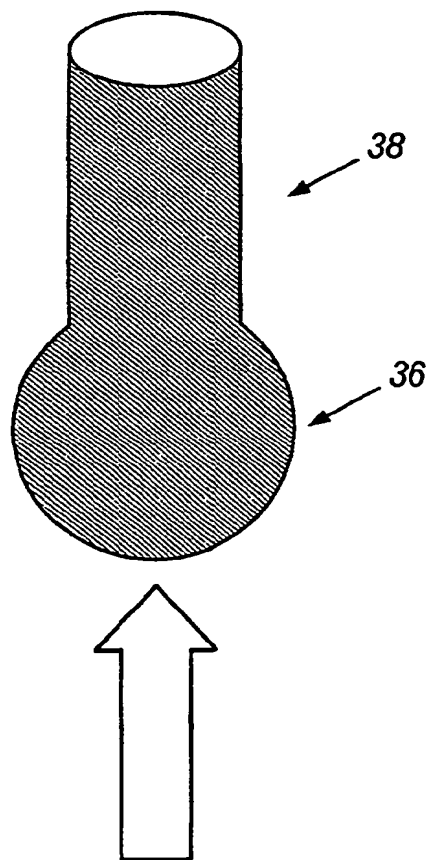


FIG. 10B

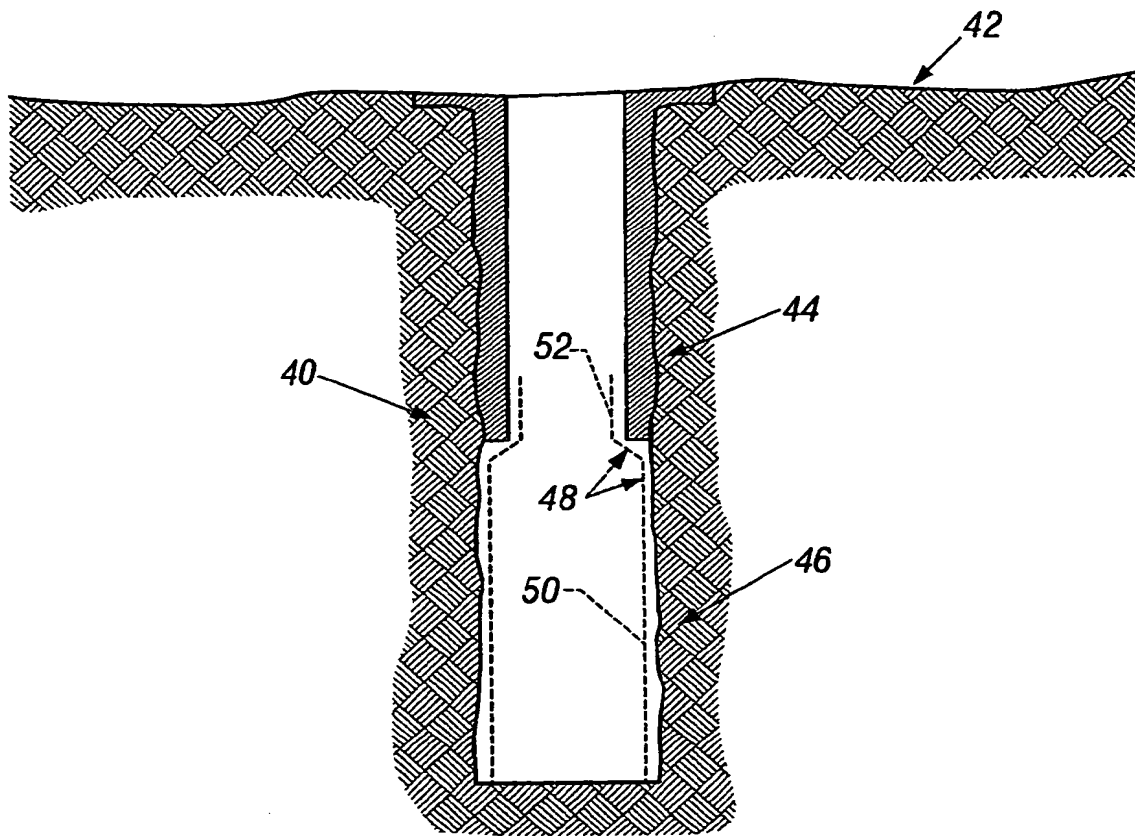


FIG. 11

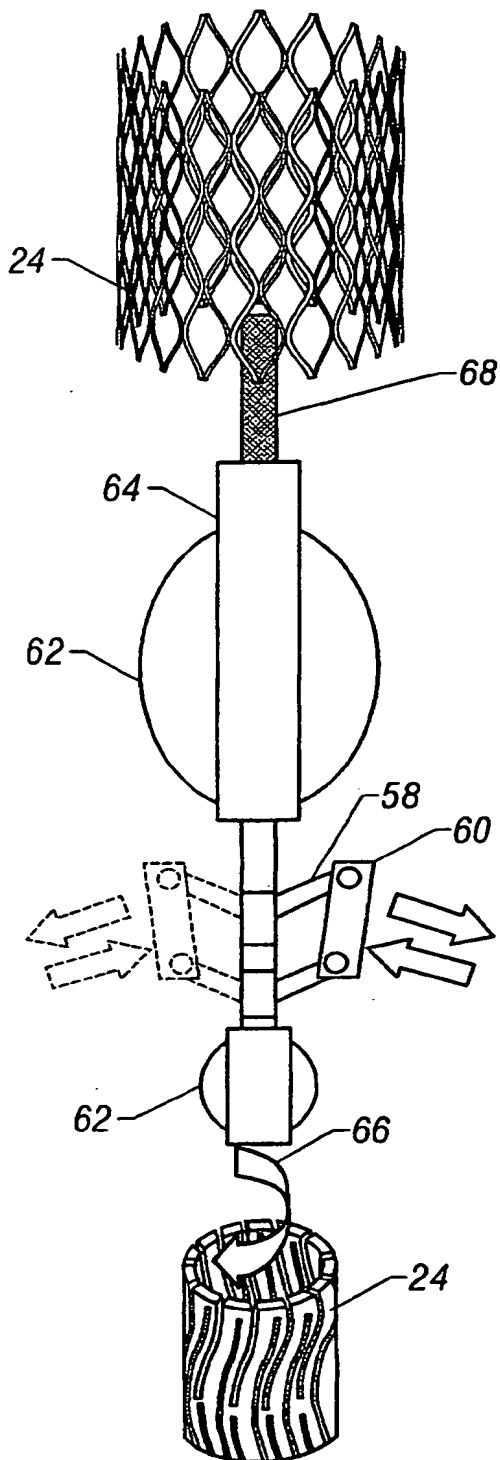


FIG. 12

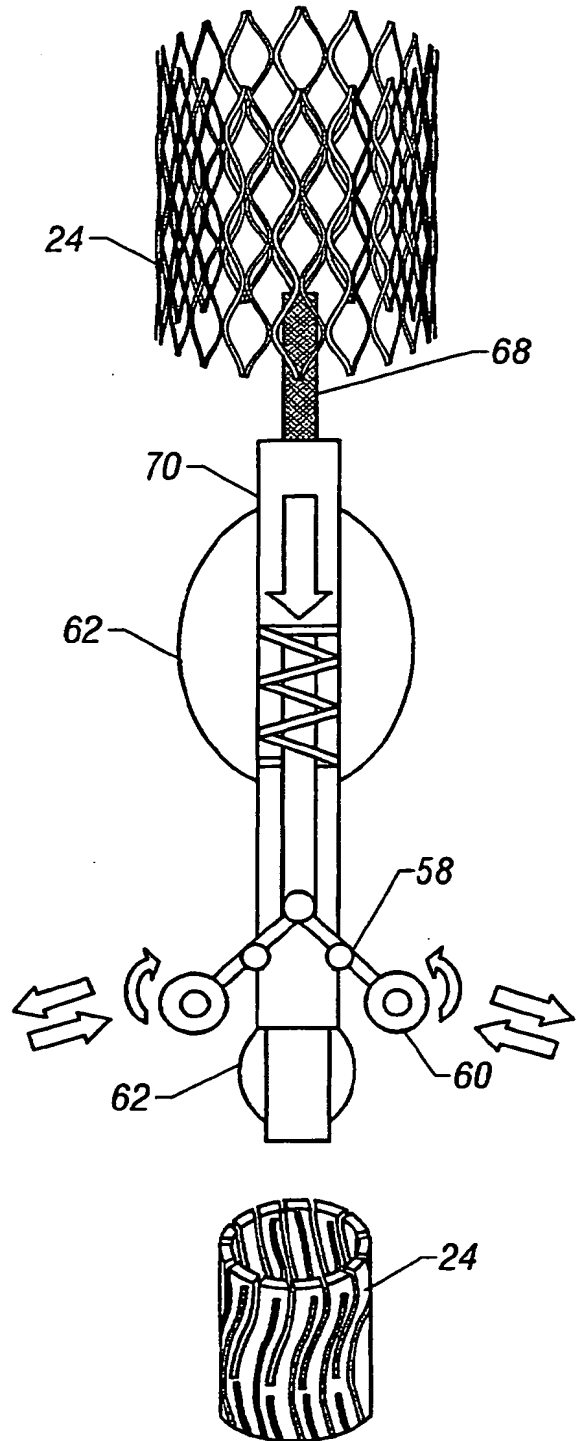


FIG. 13

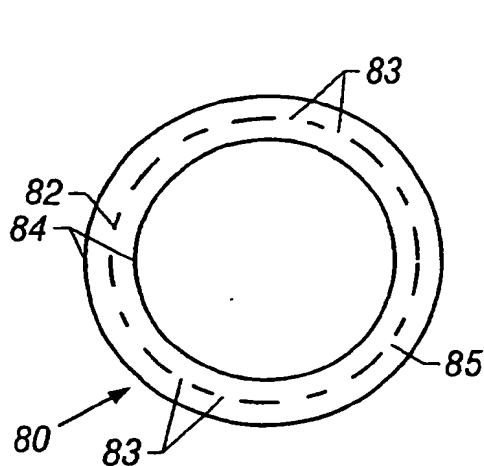


FIG. 14

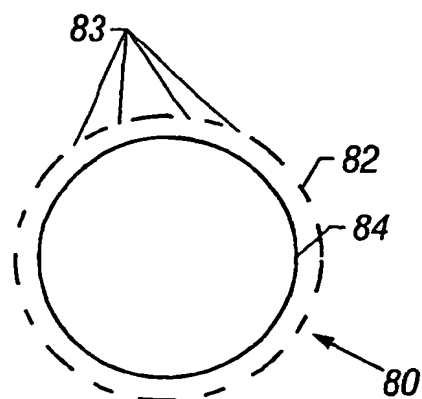


FIG. 15

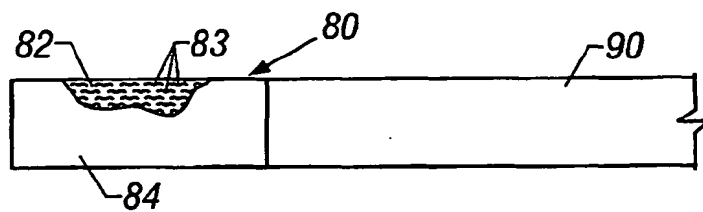


FIG. 16

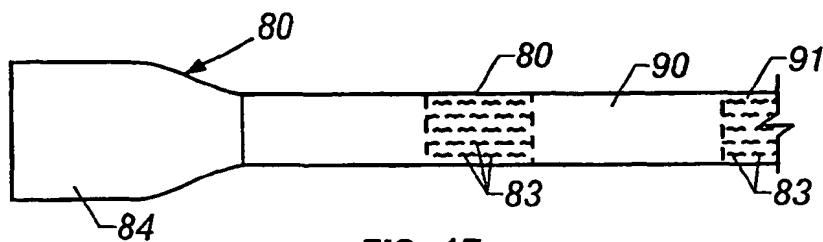


FIG. 17

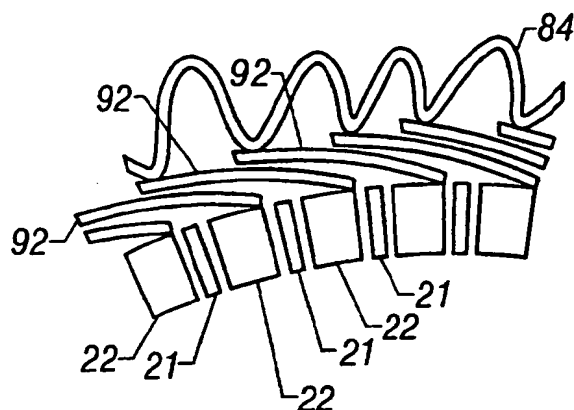


FIG. 18A

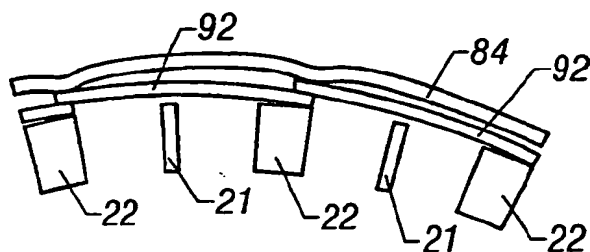


FIG. 18B

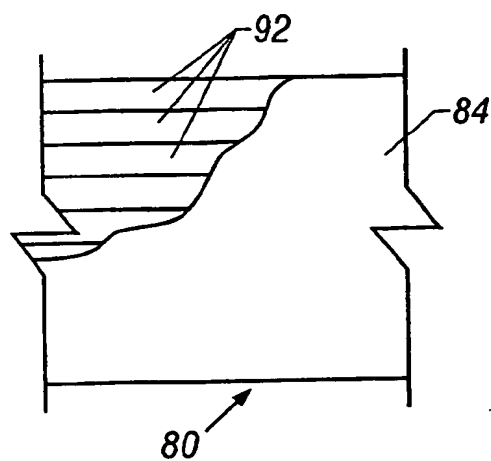


FIG. 18C

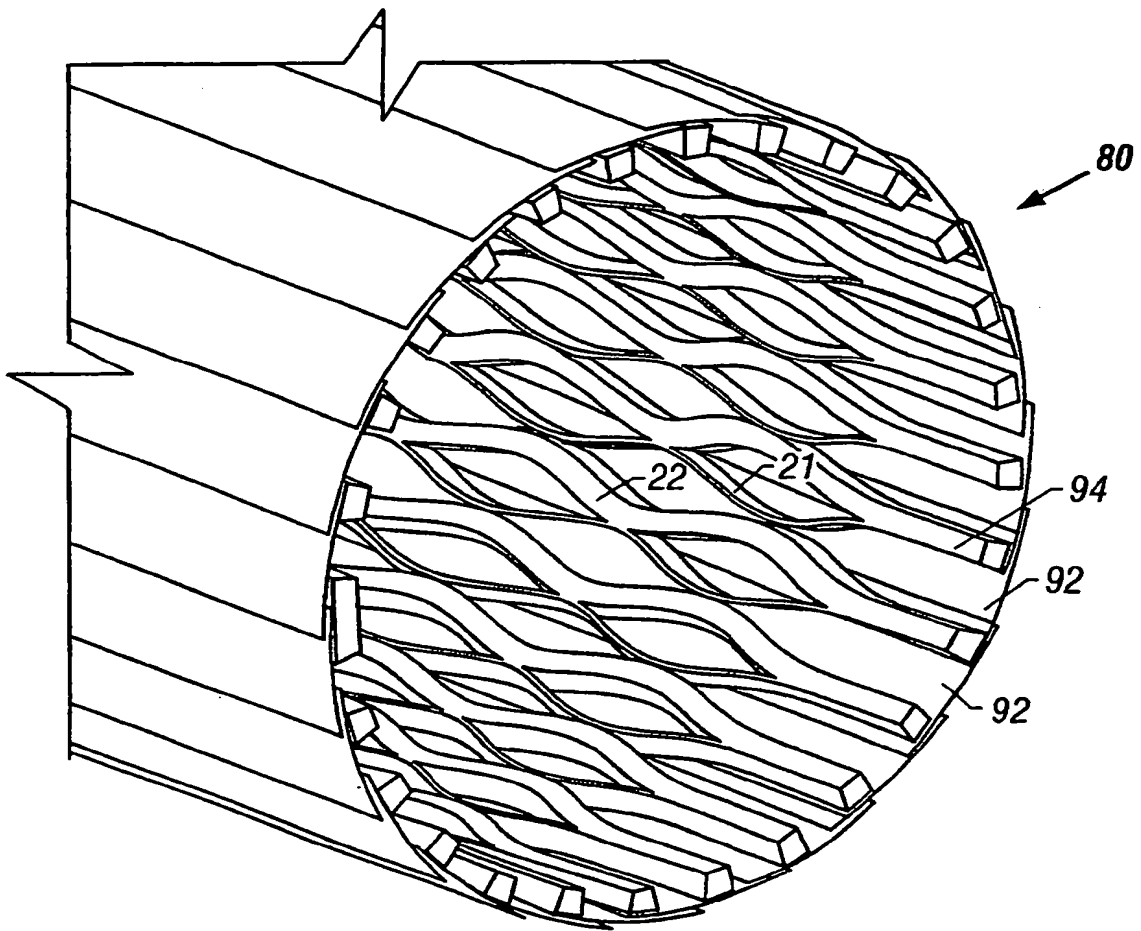


FIG. 19

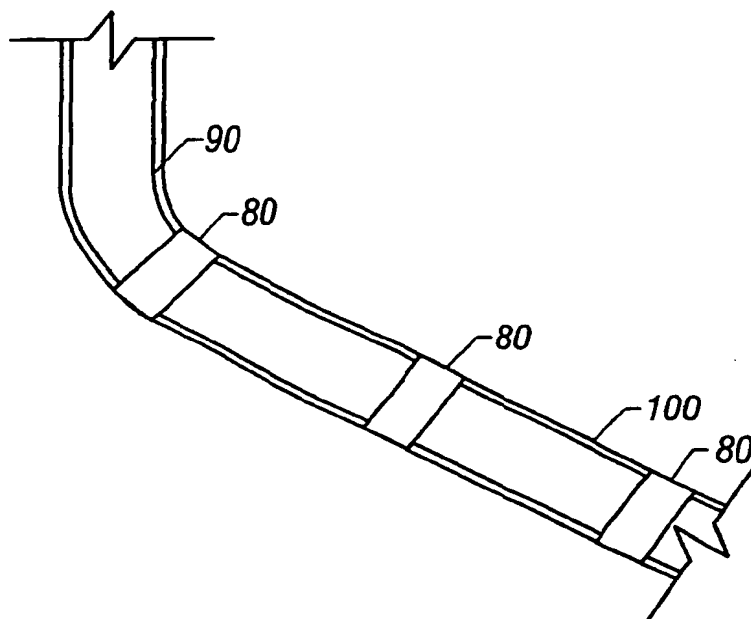


FIG. 20

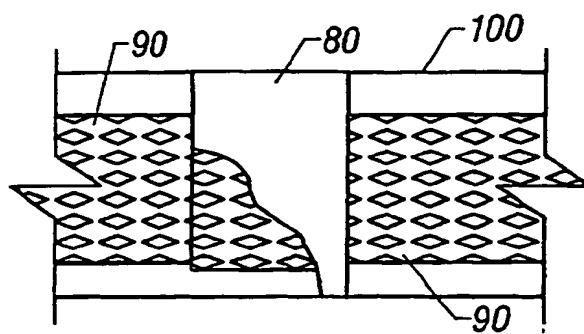


FIG. 21

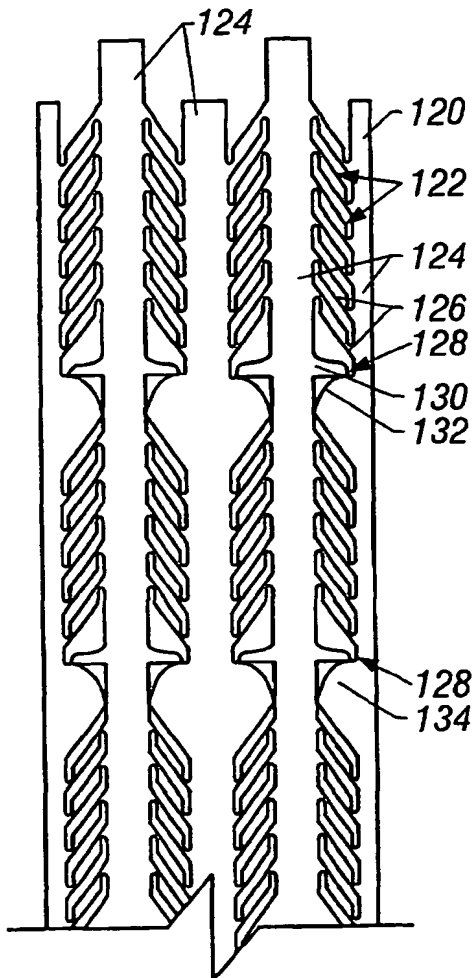


FIG. 22A

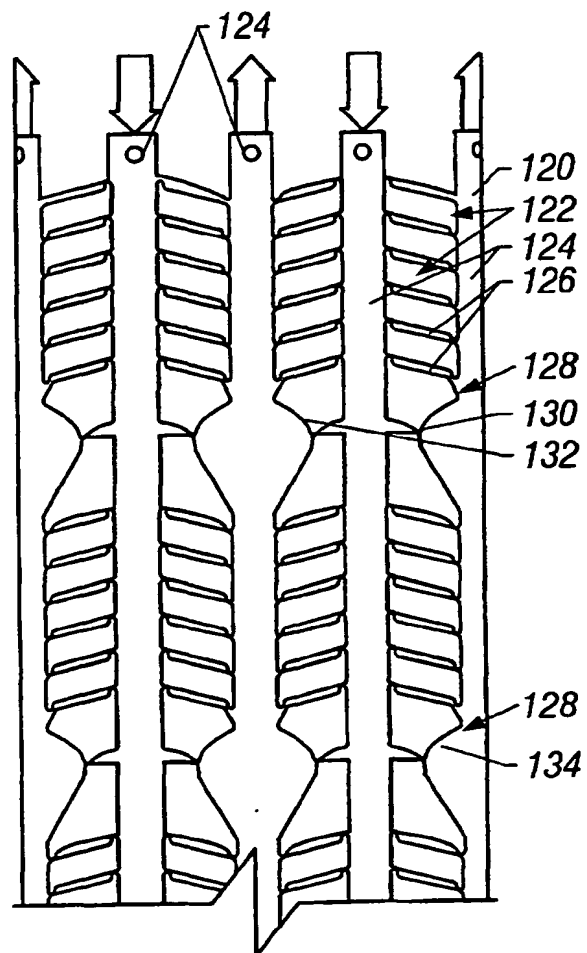


FIG. 22B

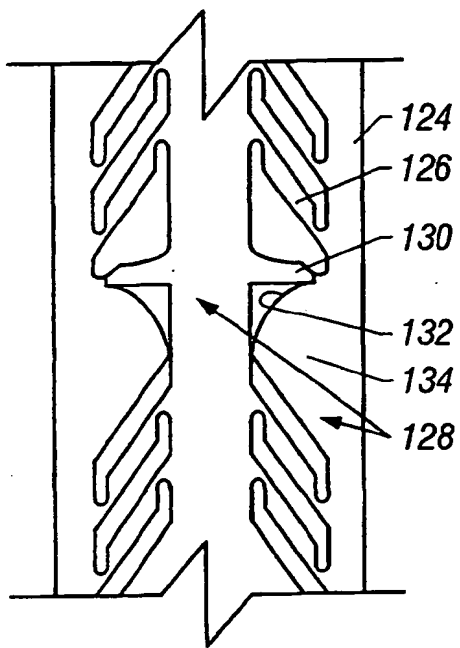


FIG. 23A

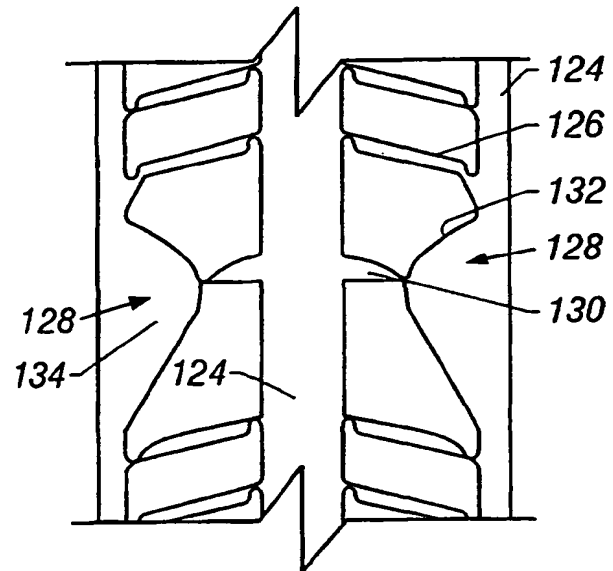


FIG. 23B

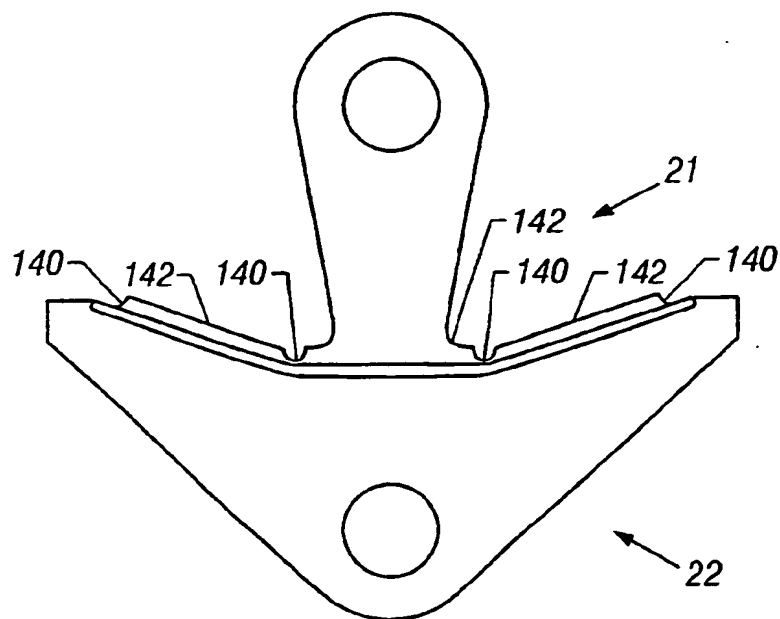


FIG. 24A

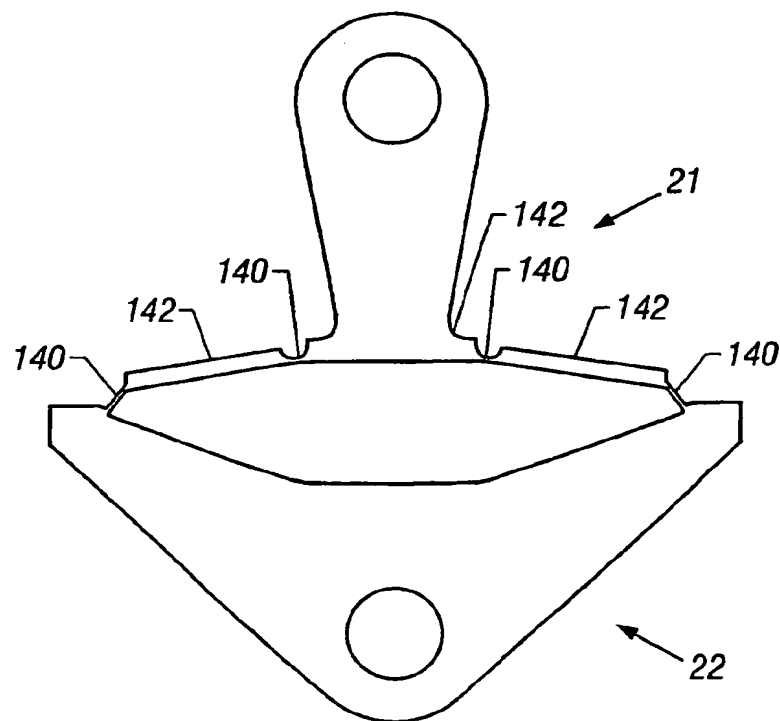


FIG. 24B

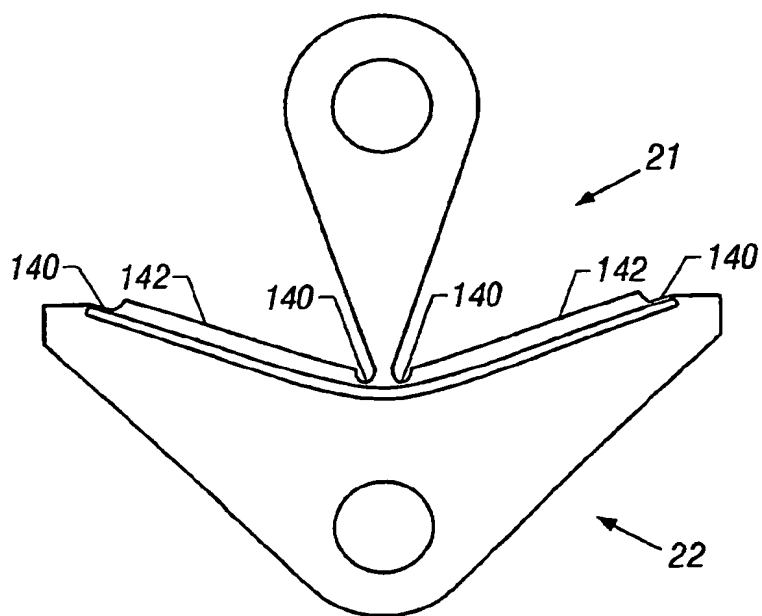


FIG. 25A

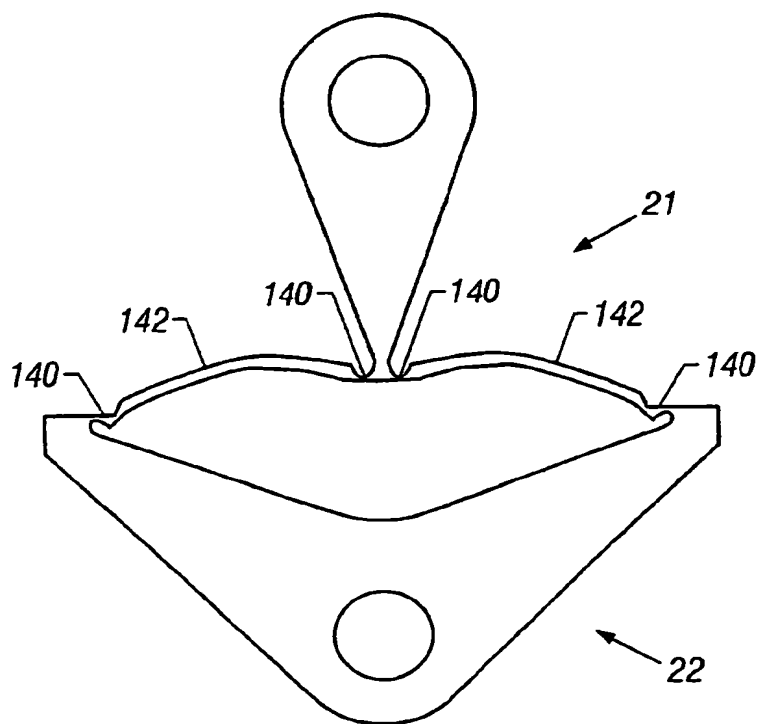


FIG. 25B

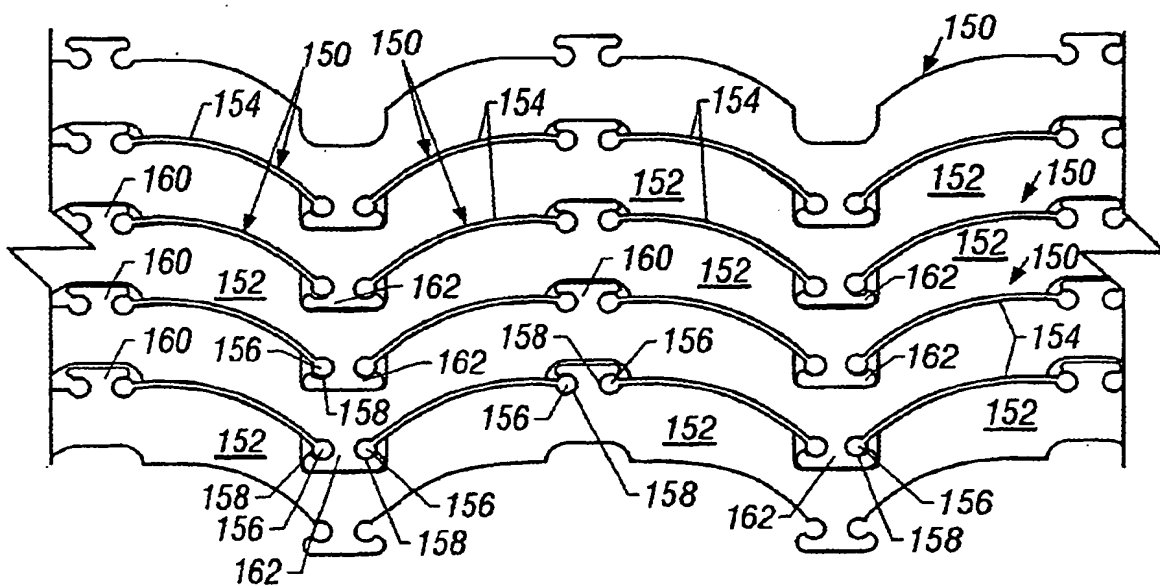


FIG. 26A

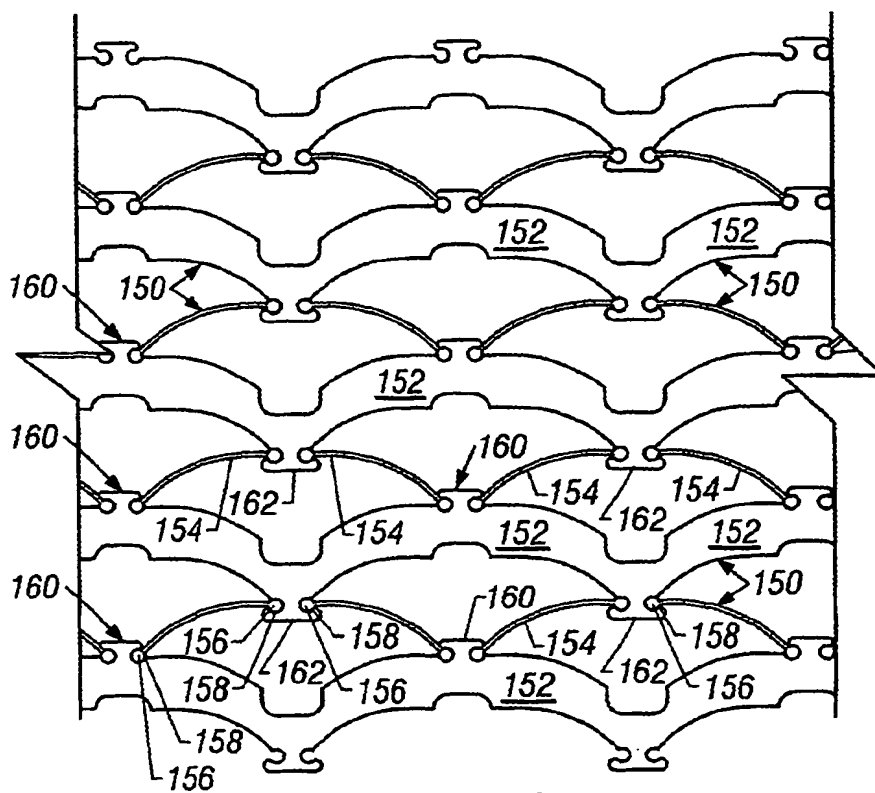


FIG. 26B

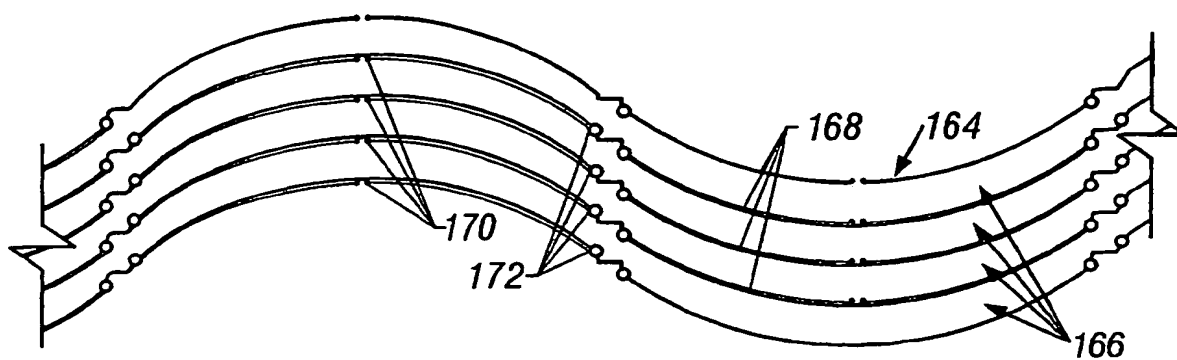


FIG. 27A

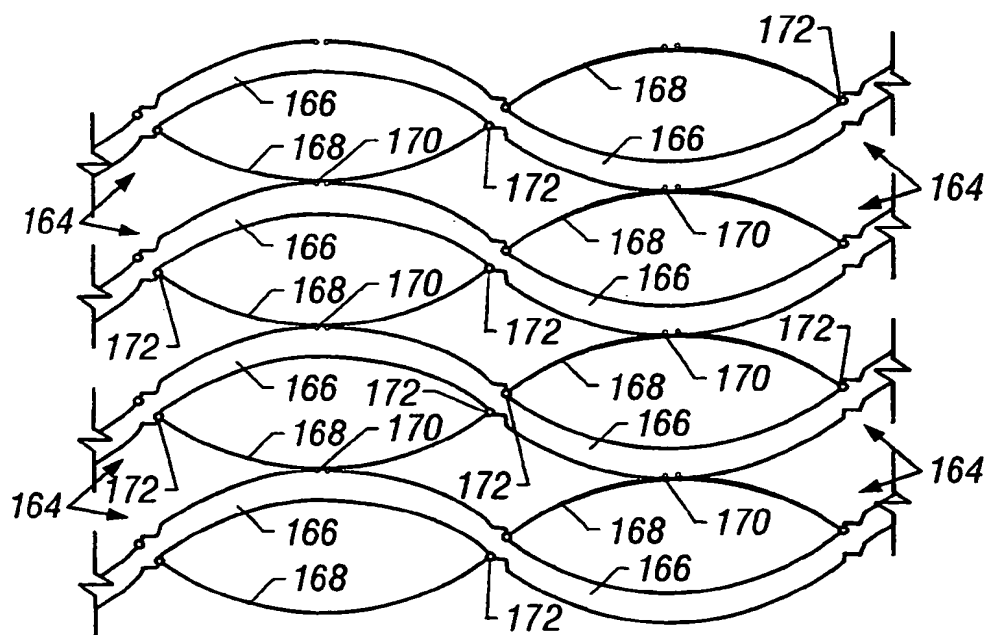


FIG. 27B

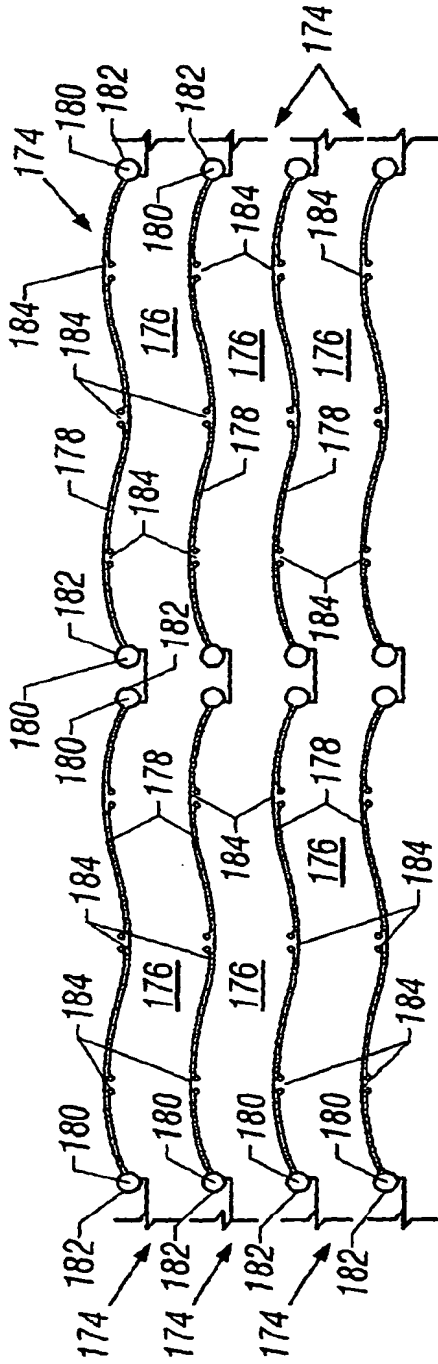


FIG. 28A

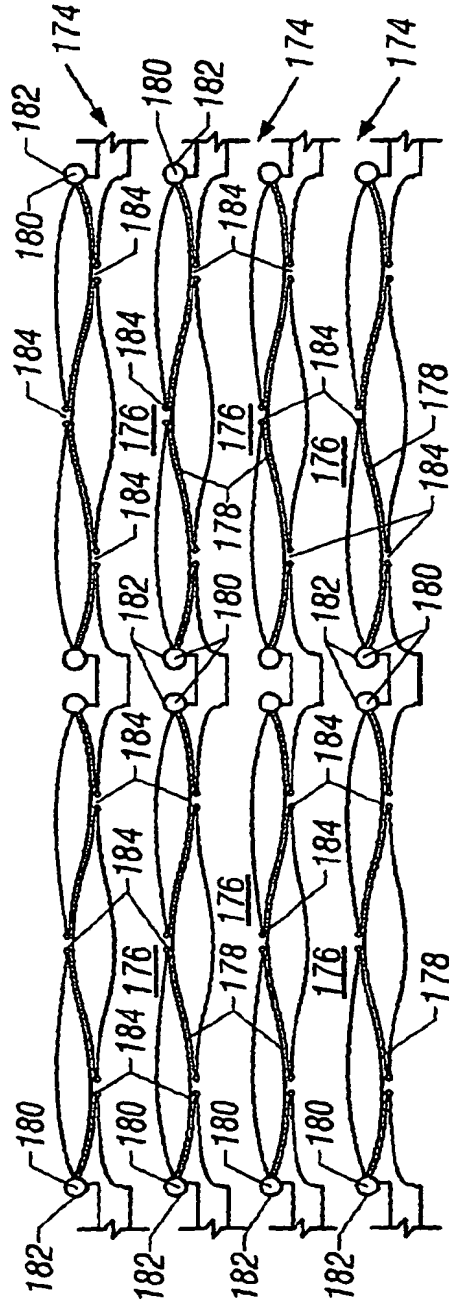


FIG. 28B

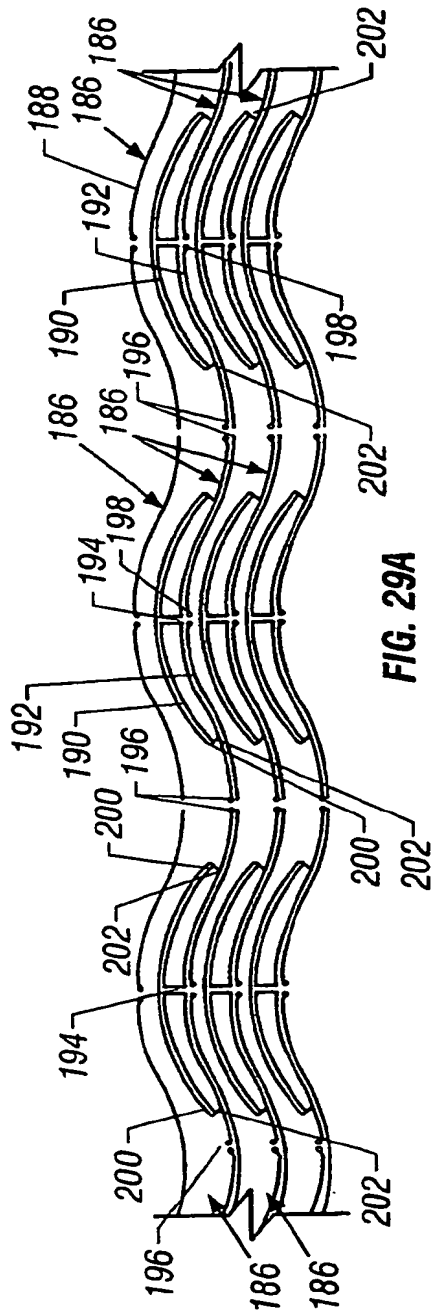


FIG. 29A

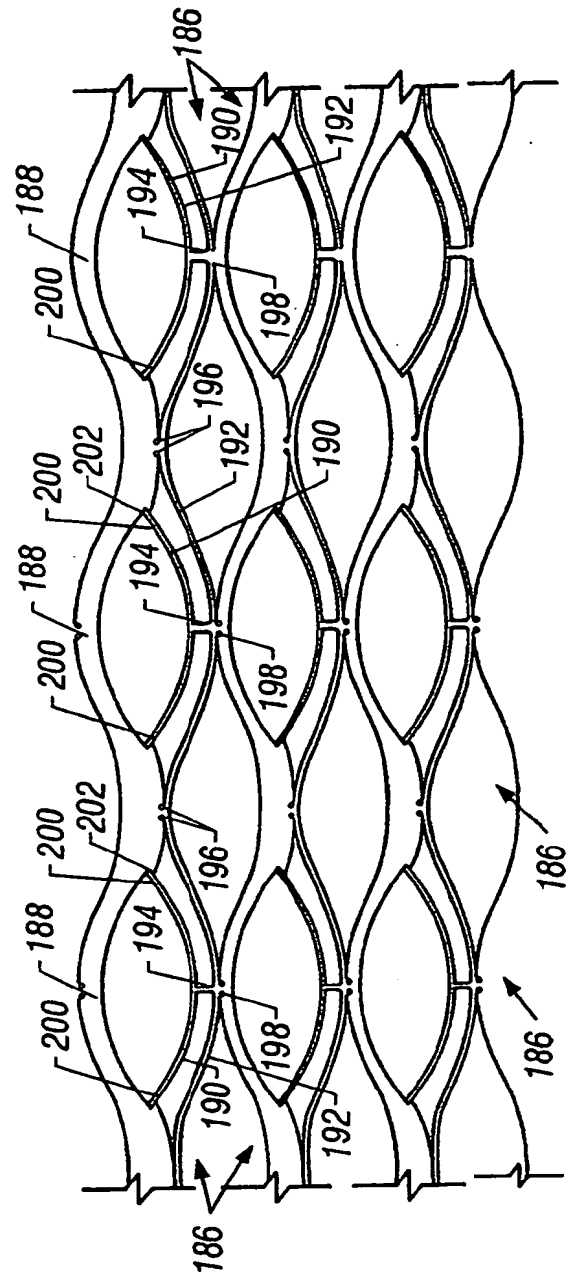


FIG. 29B

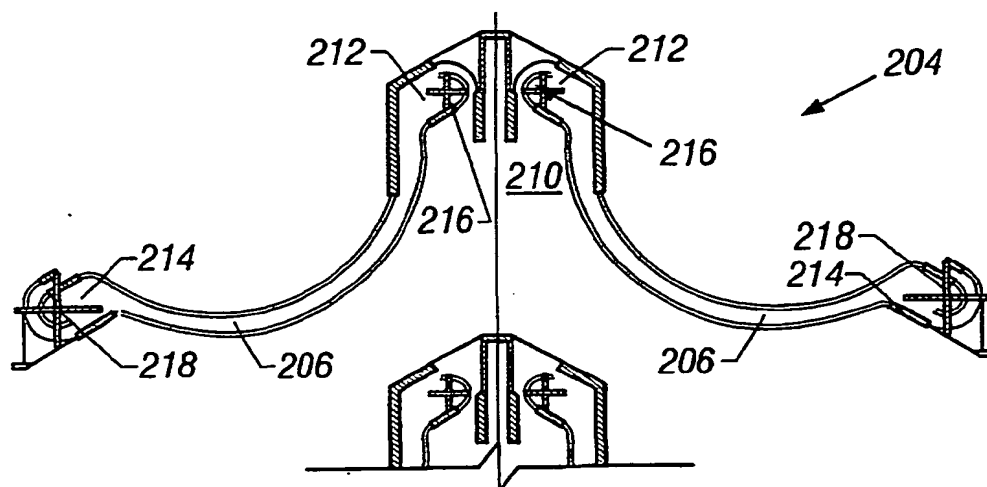


FIG. 30A

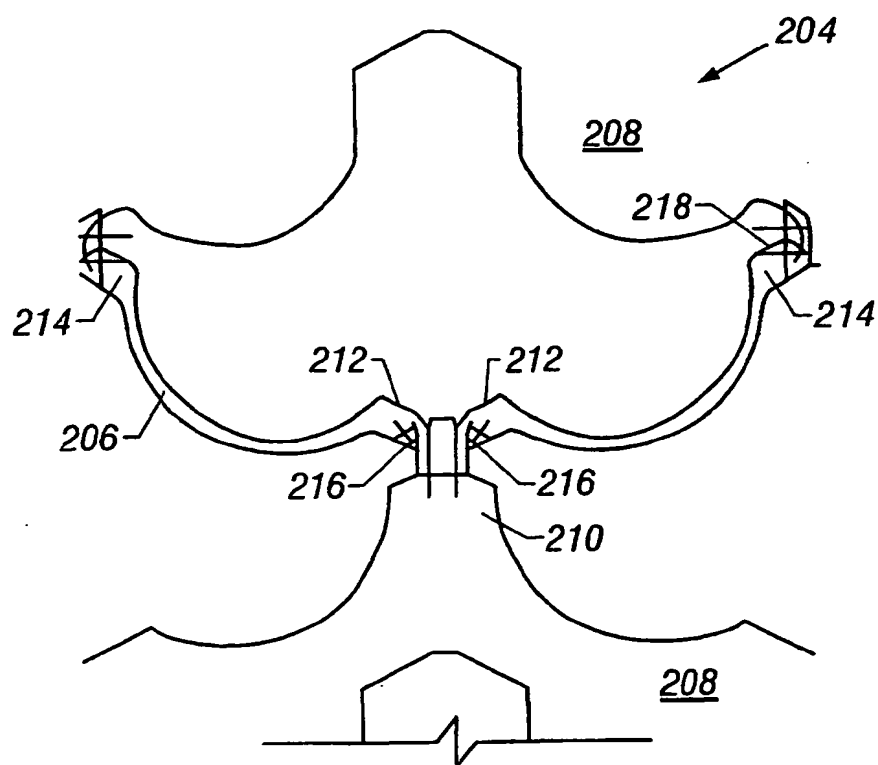


FIG. 30B

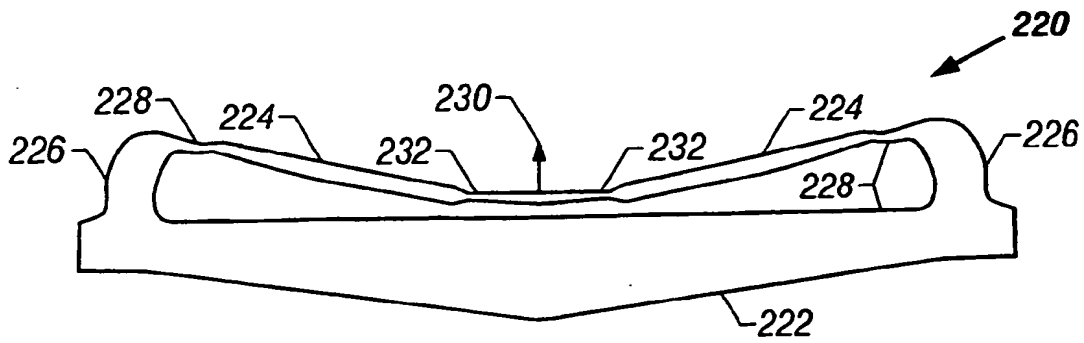


FIG. 31A

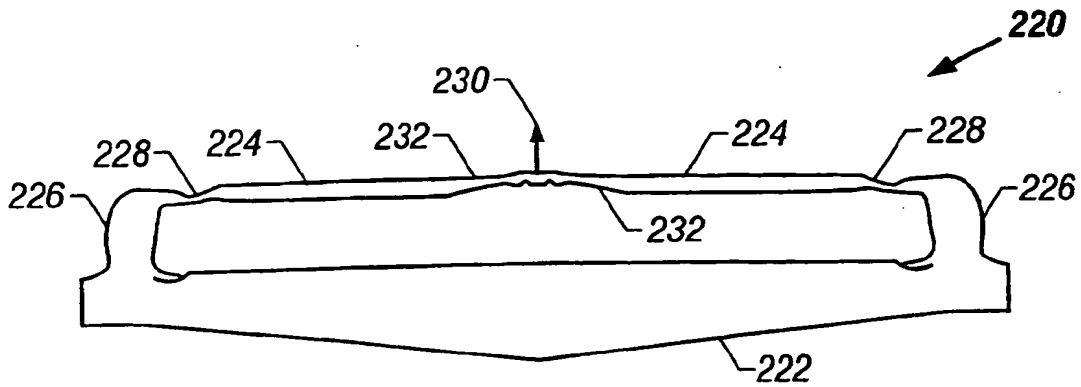


FIG. 31B

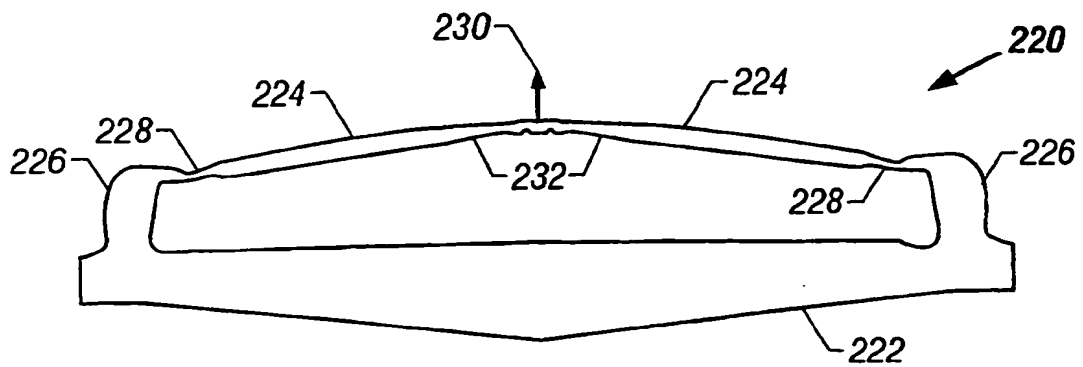


FIG. 31C

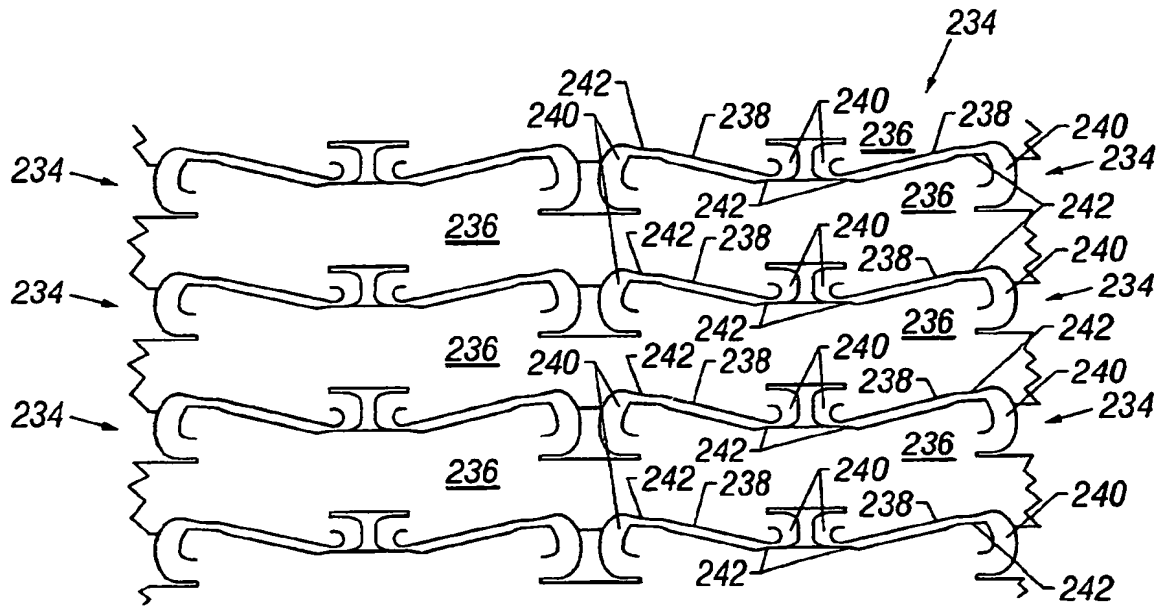


FIG. 32A

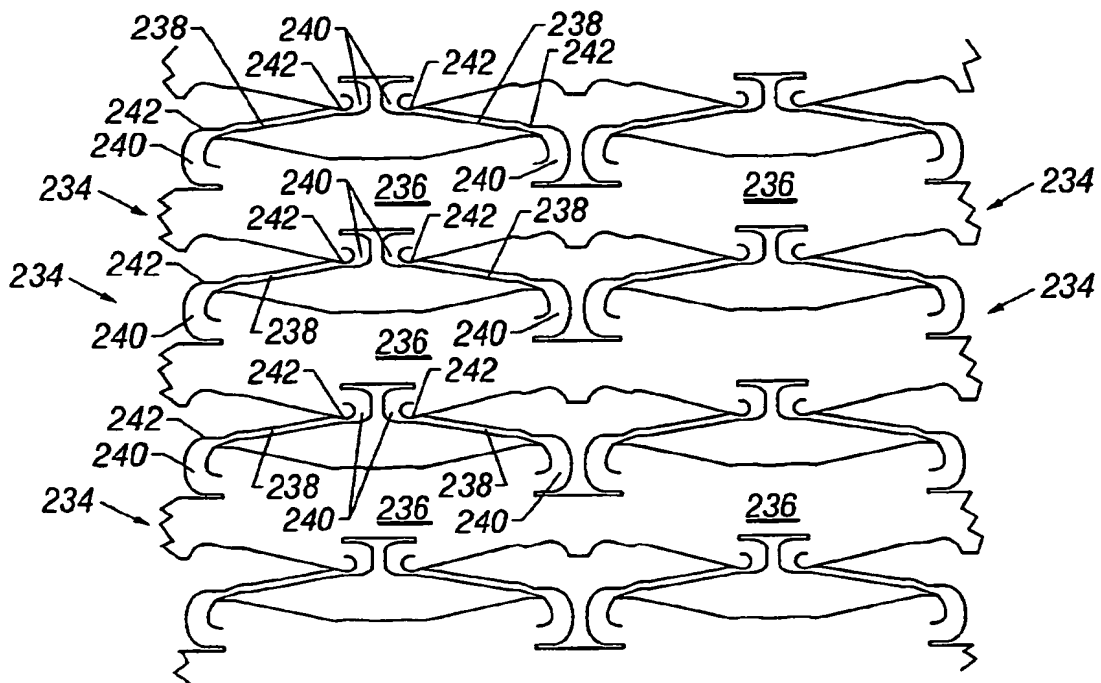


FIG. 32B

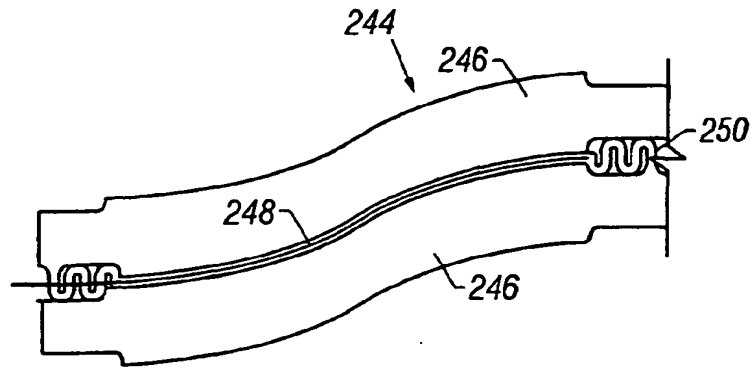


FIG. 33

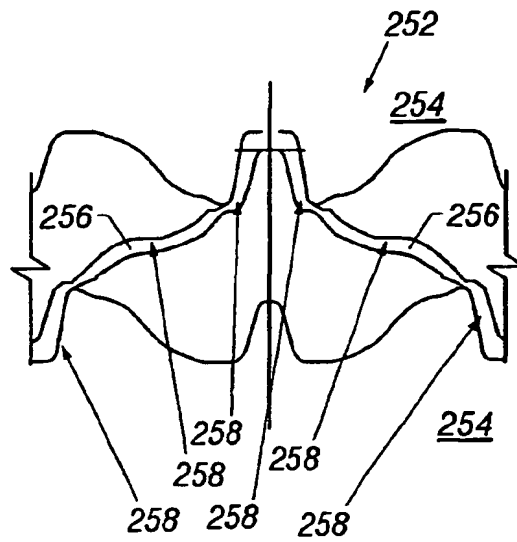


FIG. 34

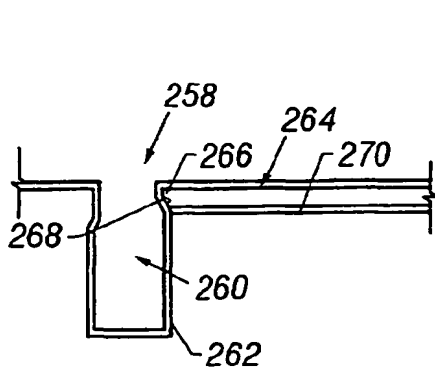


FIG. 35A

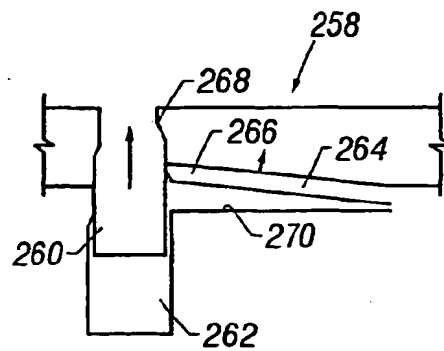


FIG. 35B

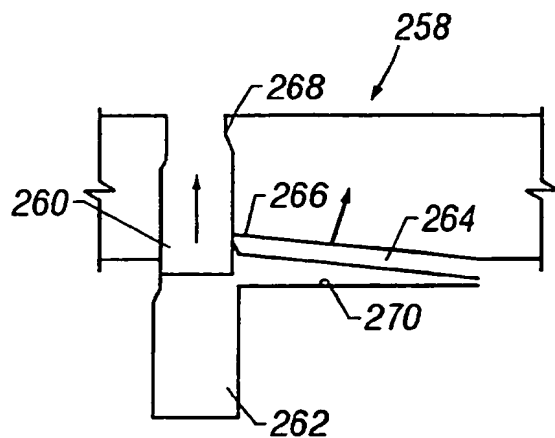


FIG. 35C

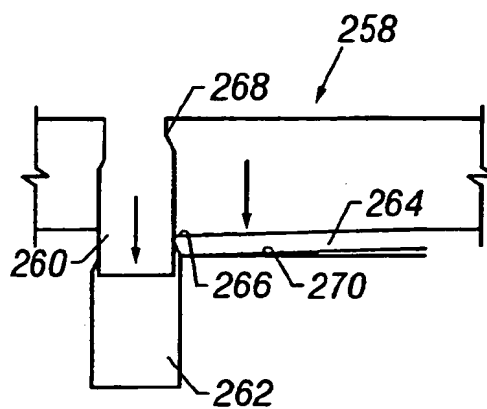


FIG. 35D

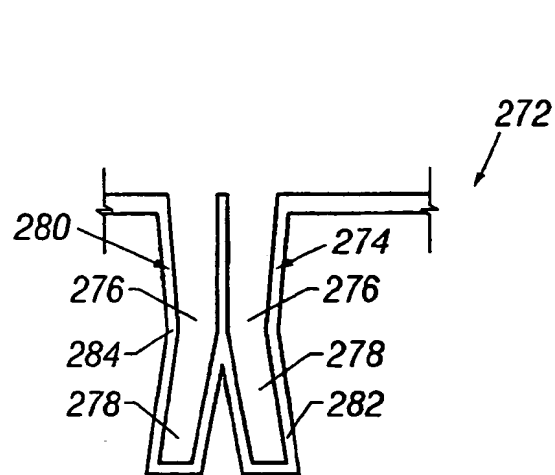


FIG. 36A

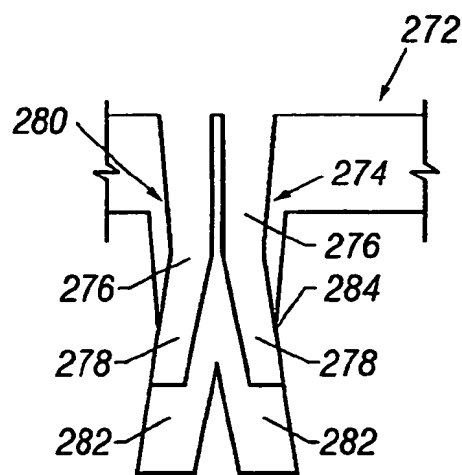


FIG. 36B

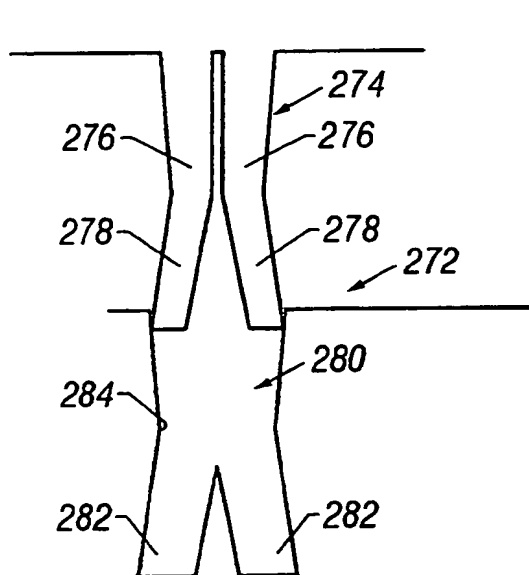


FIG. 36C

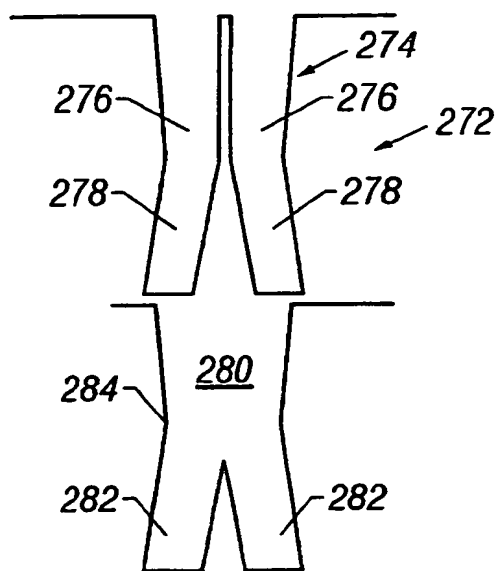


FIG. 36D

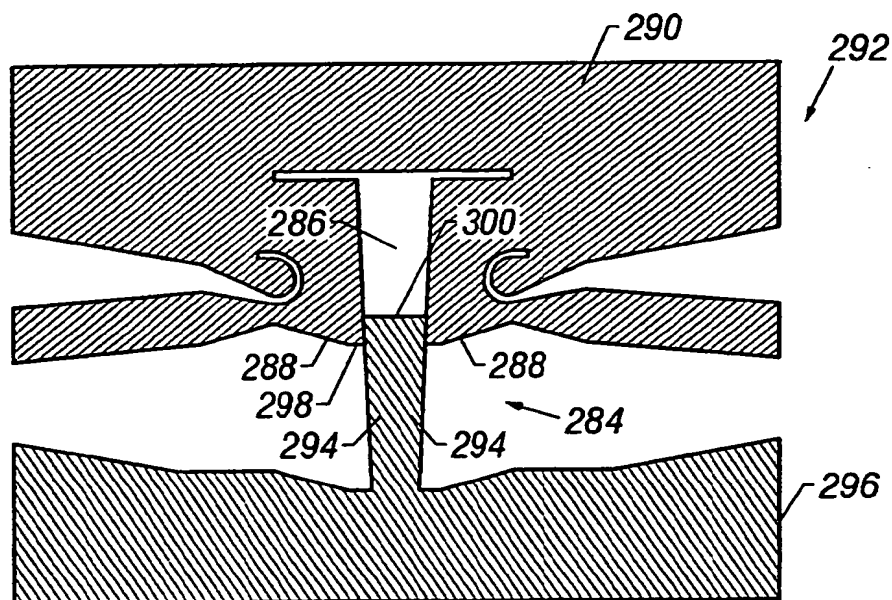


FIG. 37

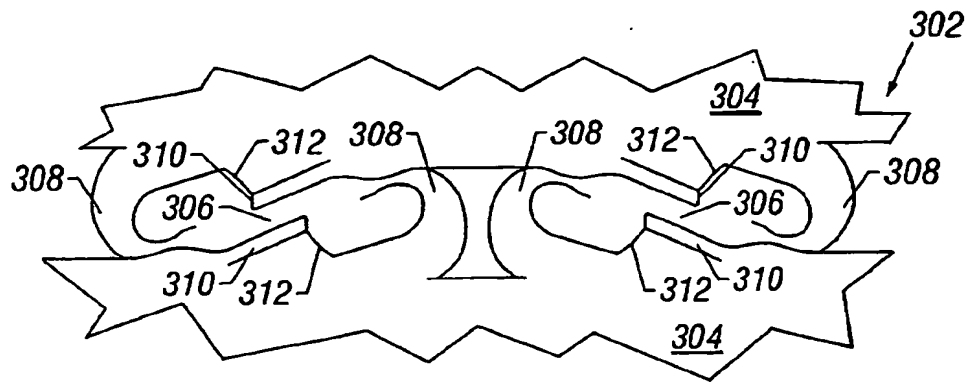


FIG. 38A

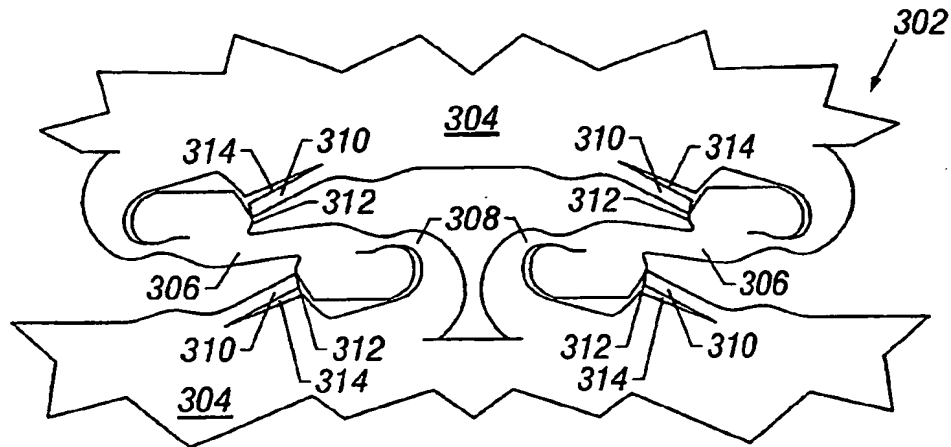


FIG. 38B

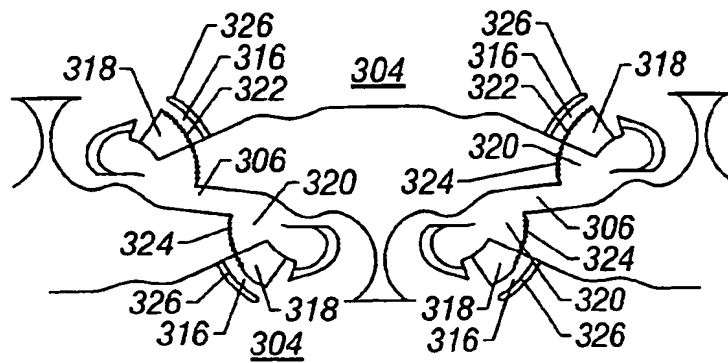


FIG. 39

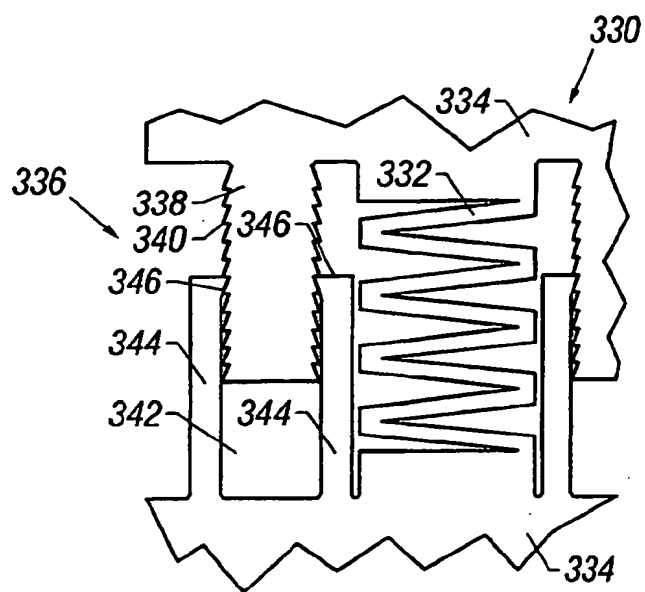


FIG. 40A

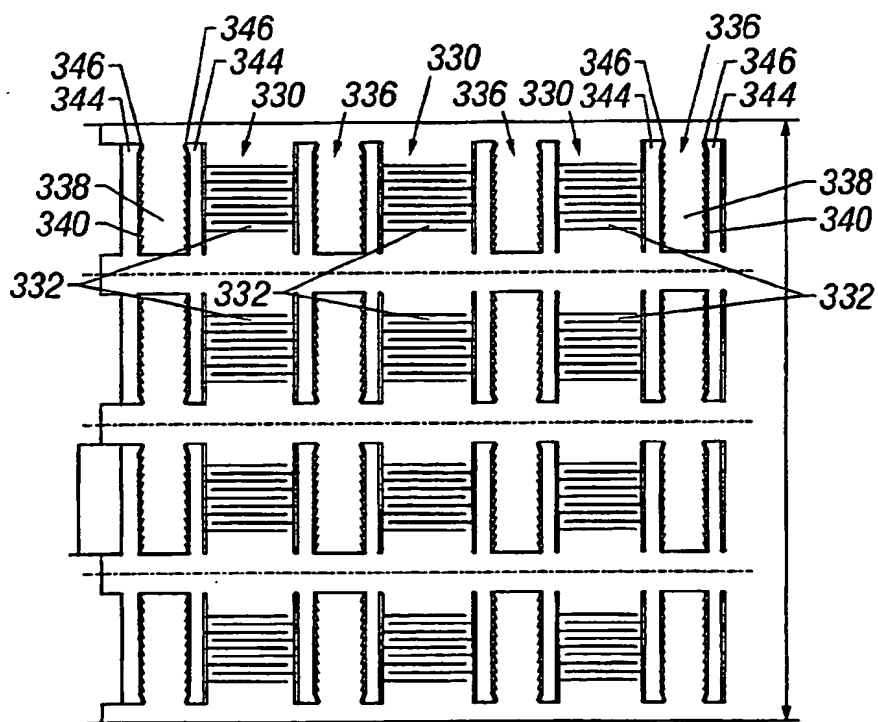


FIG. 40B

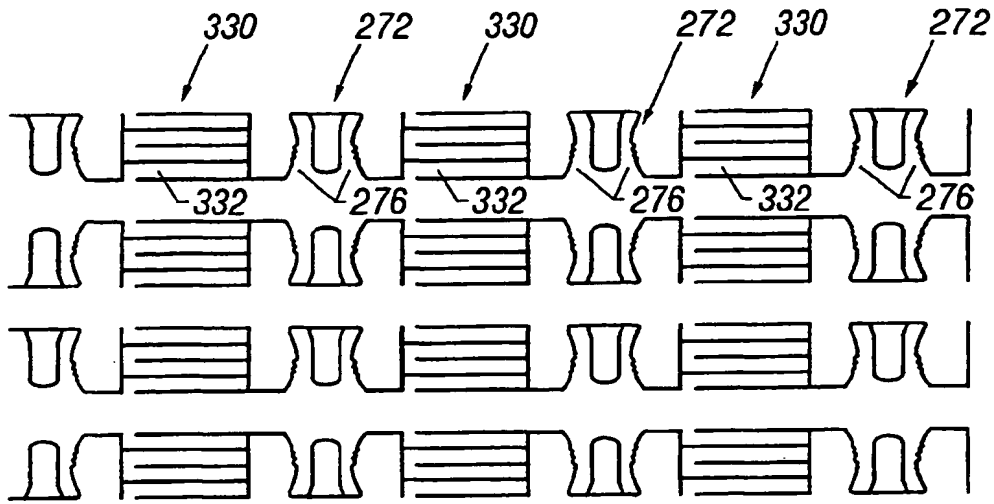


FIG. 41A

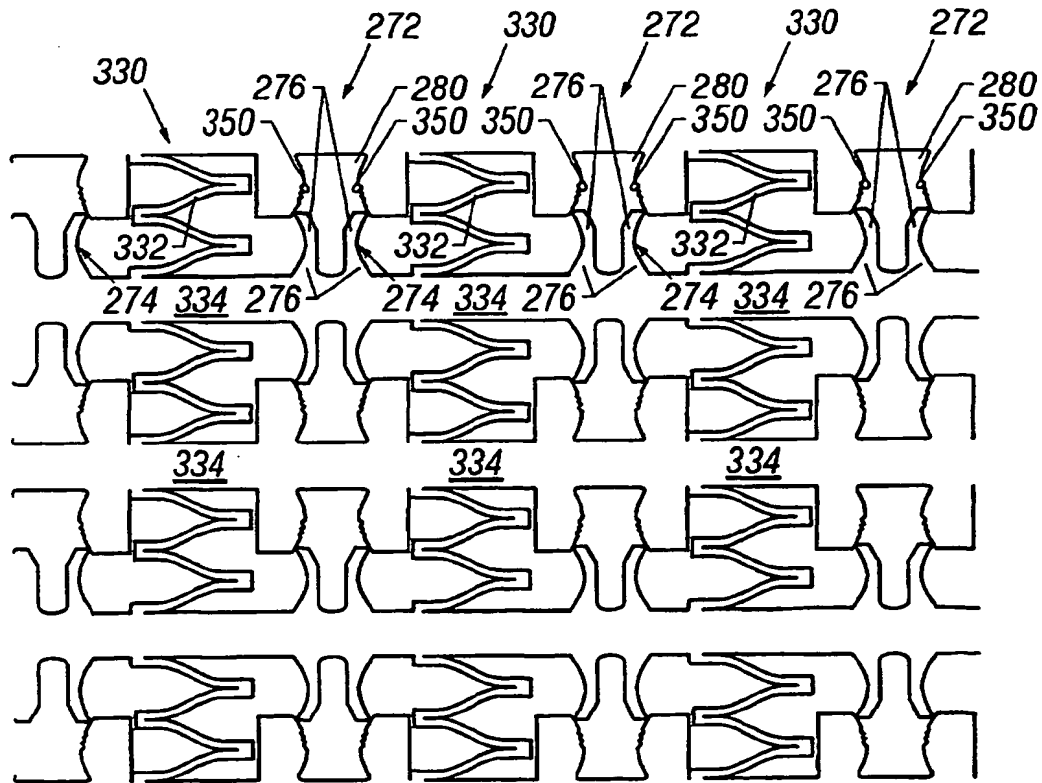


FIG. 41B

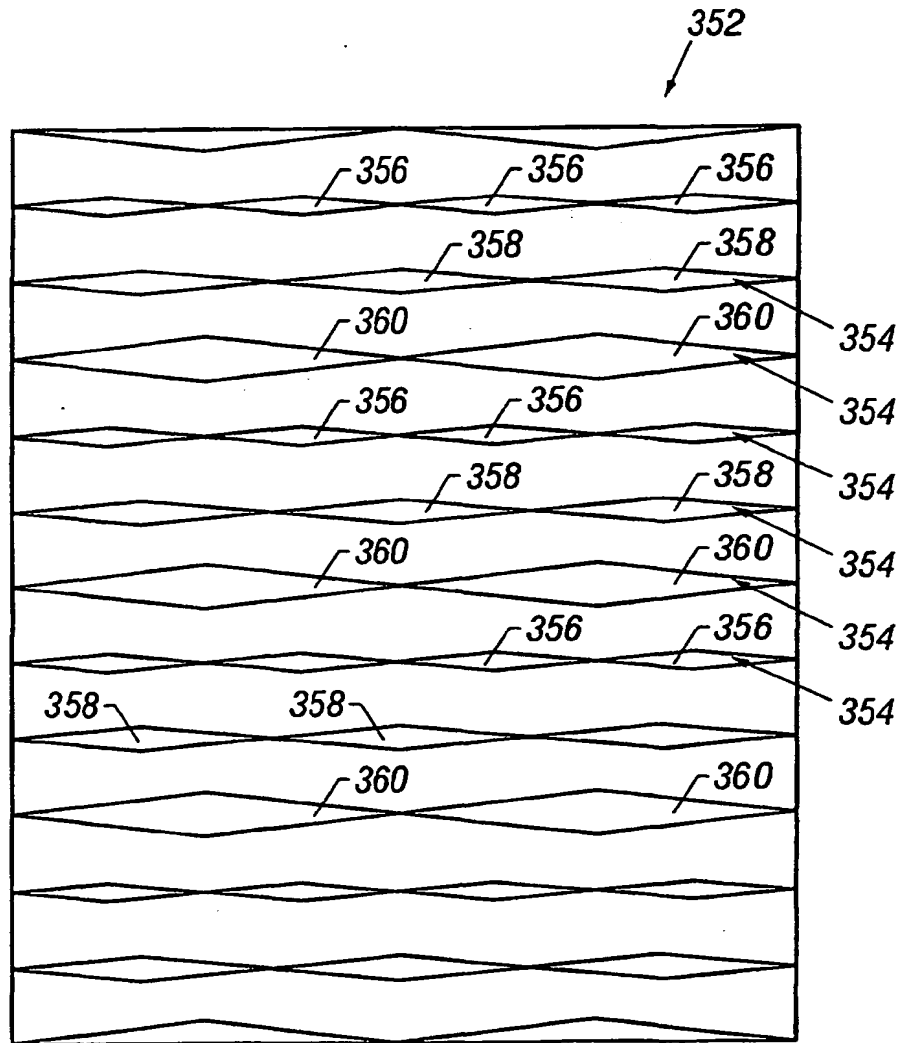


FIG. 42

THIS PAGE BLANK (USPTO)